

TFHC-K®

天福宏承密封元件



嵩贊油封工業股份有限公司

SO GIANT OIL SEAL INDUSTRIAL CO., LTD.

Customer
Concept
Competition

顧客至上
觀念領導
競爭成長

Full Range

Fast Delivery

Easy Price



TFHC-K[®]
天福宏承密封元件

ISO-9001
ISO-14001
OHSAS-18001



TFHC-K[®]

天福宏承密封元件

ISO-9001

ISO-14001

OHSAS-18001



油封廣泛應用於
汽機車產業、避震器
工業減速機、馬達
工具機產業、液氣壓產業

TFHC-K[®]

天福宏承密封元件

SOG & H.T



DING ZING 台灣指定銷售公司





快速， 質量和 效能 應用

TFHC-K[®]

天福宏承密封元件

As natural resources become increasingly scarce, the world's appetite for them still keeps growing.

We develop innovations that have a positive impact on society, while helping our customers save energy,

reduce emissions and improve efficiency. We call this our Blue Dimension.

Explore our solutions from space to seabed. Visit our showroom.

The world of Tsae Sheng at WWW.SHDNSF.COM




液壓缸專用油封



TFHC-K[®]

天福宏承密封元件

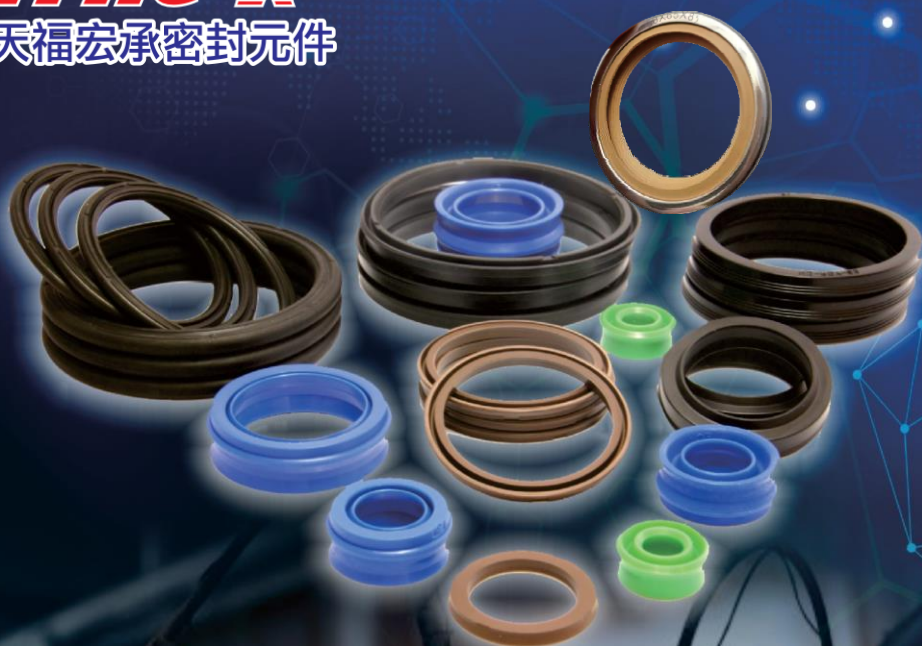

自動化AI密封設計
機器手臂 線性滑軌
無給油的最佳設計方案



TFHC-K®

天福宏承密封元件

ISO-9001

ISO-14001

OHSAS-18001



最高級的耐化學性 高溫
極低的壓變 極高的機械強度
多用途 全氟醚彈性密封元件



O/X-Rings



O-Rings Cord



O-Rings Kit

FFKM-PPE
SOG&H.T

TFHC-K[®]
天福宏承密封元件



O-RING



OEM客製O型圈



包覆式 O型圈

我們提供符合食品級、醫療級
防爆型瓦斯規範EN549
常規O型圈
及客製化橡膠製品



TFHC-K®

天福宏承密封元件




High pressure, low friction, chemical,
food environment Spring Teflon oil
seal with composite material

高耐壓、低摩擦、化學、食品環境
應用複合材質的彈簧鐵氟龍油封

PTFE SEALS
SOG&H.T

TFHC-K[®]
天福宏承密封元件

High Performance Gasket Set

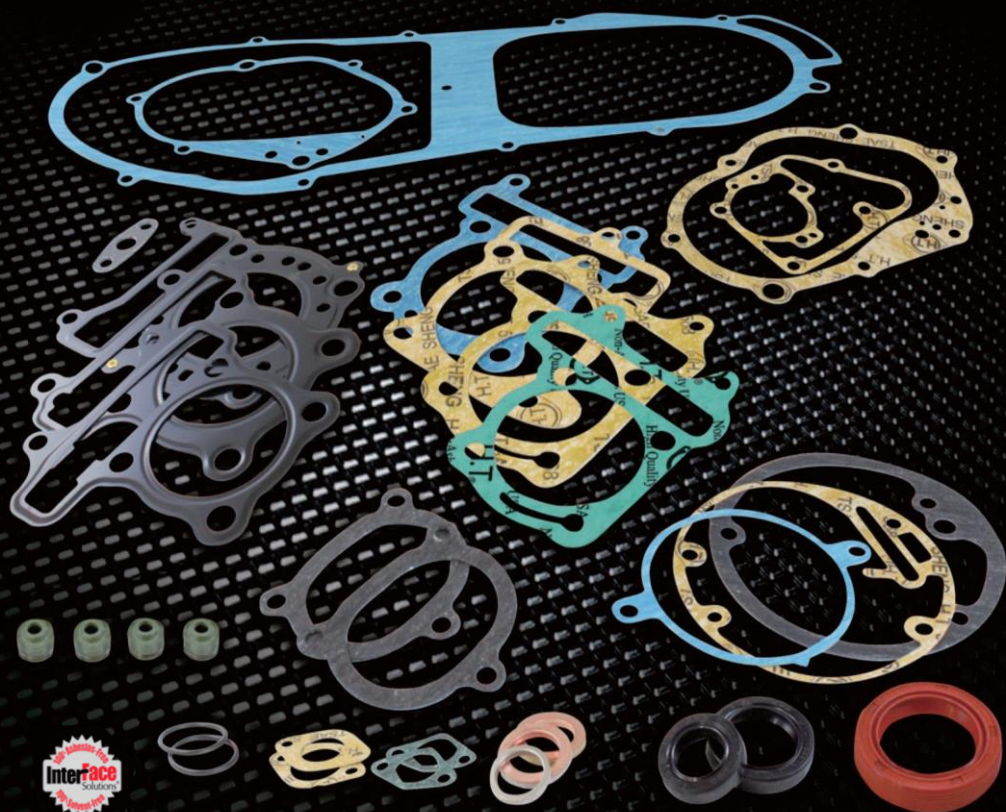

Most professional gasket experts
High-quality experience by you

TFHC-K[®]

天福宏承密封元件

農業機械油封

適合泥漿水
惡劣工況條件選用
多種機型油封庫存即時供應



浮動油封



輪軸油封



合體油封

TFHC-K[®]

天福宏承密封元件



摩托車密封元件

機車密封市場深研35年

開發日系、歐系等...

多種車款墊片以及油封也能提供相關車款修理包

TFHC-K[®]

天福宏承密封元件

橡膠夾紗膜片

高強度耐油夾紗橡膠膜片

橡膠夾紗用於多元密封環境

依照需求形式客制化生產

法蘭膜片
化油器膜片
電磁閥膜片




TFHC-K[®]

天福宏承密封元件



特殊複合材料密封件
專用於石油 化工
鋼鐵 閥門產業
接受特殊訂製尺寸

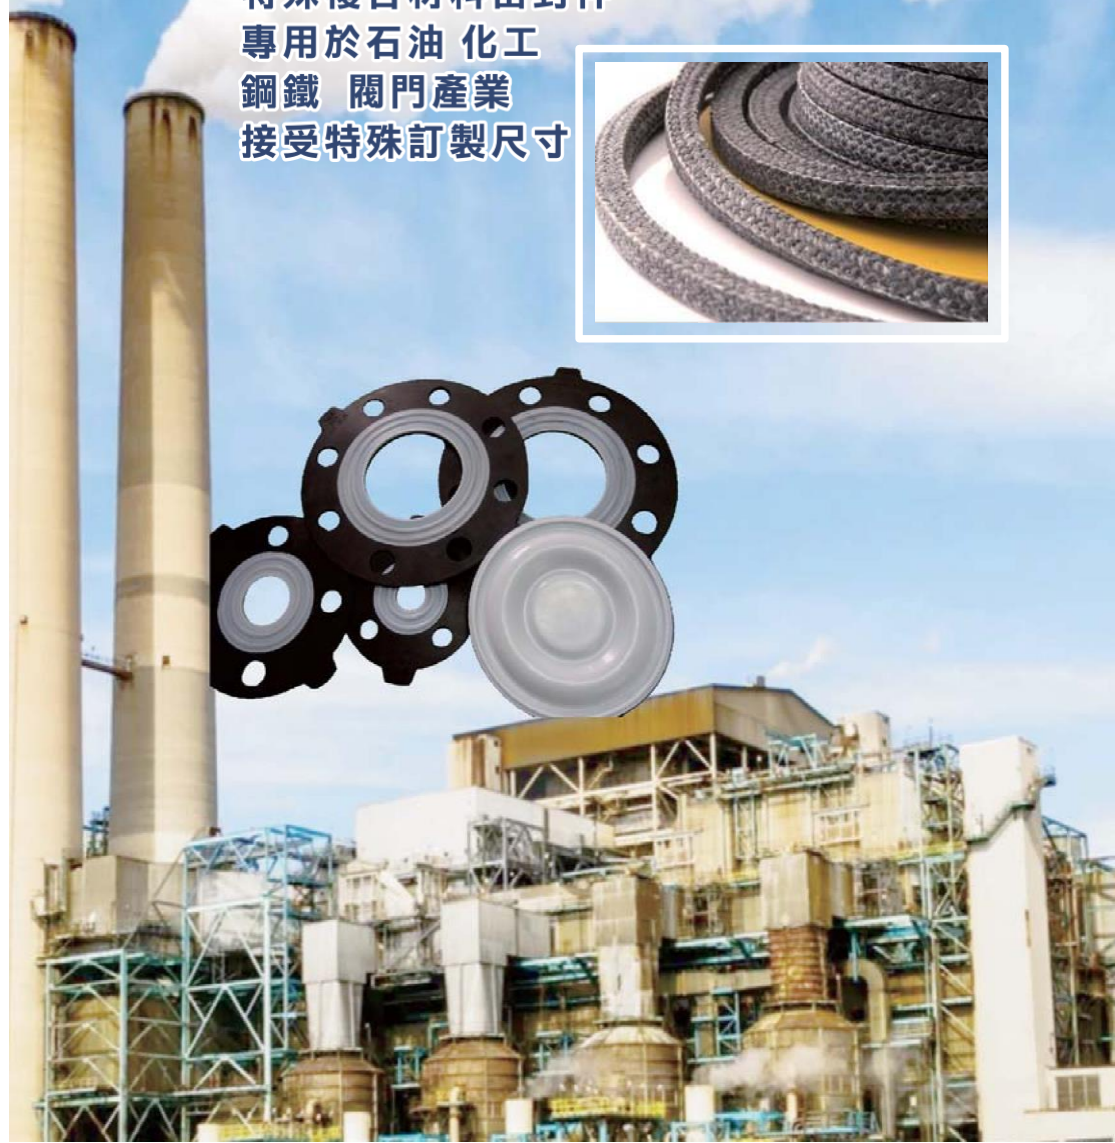

HT&SOG OIL SEAL

<https://www.tfhc-oilseal.com>

序言

台灣天福宏承密封有限公司為油壓、空壓、旋轉密封件之專業密封件整合供應商。

此文本主要介紹TFHC-K出品，SOG & HT製造的骨架油封、O/X型圈與橡膠客製化製品(材質：PU/TPR/PTFE/FFKM)適用於：汽機車、電動車、農業機具、民生家電、軌道交通、海事、航天設備、石油化工、煉鋼、重工、工程機械、AI電子設備、綠能發電產業之密封應用。

“品質至上、快速服務、唯新產品” 是我們的服務方向
“貫徹服務、技術創新、永續經營” 是我們的經營理念

我們以先進的生產技術、嚴格的品管制度、快速的售後服務，來滿足國內外各產業的生產配套銷售維修客戶群的需求。志要為每位客戶夥伴們提供一流的密封技術，作為產業界可依賴的主供應商，優質的產品將產出於優質的工作環境，是源自於我們對產品、員工、廠區的自主要求。

我們符合ISO-9001品質認證要求的產品質量
我們符合ISO-14001環境管理系統標準的作業環境
我們符合OHSAS-18001職業安全衛生管理體系的廠區

目錄內的型號規格及尺寸，可作為經銷夥伴的銷售參考，以及終端客戶的機械設計與實際安裝參考指南，我們採用台灣及國外的高階工業密封產品與技術，尤其在非標準品、急件或產品替代，我們可以依客戶樣品或圖面做加工，最大加工直徑可達1500mm-4000mm。

若有目錄中無刊登記載的型號或尺寸，請直接和本公司業務人員聯絡我們將盡快為您服務！



Preface

TFHC-K Seals Co., Ltd. is a professional seal supplier for hydraulic, pneumatic and rotary seals.

This article introduces TFHC-K's oil seals, O/X-rings and custom rubber products made by SOG & HT.

(made from PU, TPR, PTFE, FFKM and other specific materials)

The seals are suitable for sealing applications in: automobiles, electric vehicles, agricultural machinery, household appliances, rail transportation, maritime, aerospace equipment, petrochemical, steel-making, heavy industry, engineering machinery, AI electronic equipment, and green energy generation industry.

Quality first, fast service, only new products" is our service direction.

Consistent service, technical innovation, sustainable management" is our business philosophy.

With advanced production technology, strict quality control system, and fast after-sales service, we are able to meet the needs of our customers in the production, sales, and maintenance of various industries both at Taiwan and abroad. We are committed to providing first-class sealing technology for each customer partner, and as the main supplier that the you can rely on, quality products will be produced in a quality working environment, which is derived from our independent requirements for products, employees, and factories.

Our product quality meets ISO-9001 quality certification

Our operating environment complies with ISO-14001 environmental management system standards

Our factory is in accordance with OHSAS-18001 occupational safety and health management system

The specifications and dimensions in the catalog can be used as a sales reference for our distribution partners and as a reference guide for mechanical design and practical installation for our end customers.

We use high-end industrial sealing products and technologies from Taiwan and abroad, especially for non-standard products, emergency parts or product substitution, and we can process according to the customer samples or drawings up to 1500mm-4000mm in diameter.

If there is a model or size that is not listed in the catalog, please contact our sales staff directly and we will assist you as soon as possible!



ISO-9001
ISO-14001
OHSAS-18001




TFHC-K®
OIL SEAL

目 錄

Table of Contents

1. O型圈的介紹 -----	1
Introductions of O-Ring	
2. 公差表與材質耐溫性 -----	2
Tolerance Instruction and Temperature Resistance of Materials	
3. O-X 型密封圈規格表 -----	3-33
Size List of O-ring and X-ring	
4. 全氟化O型圈規格表 -----	34-36
Size List of FFKM O-ring	
5. 耐油O型條規格表 -----	37
Size List of Rubber Strip	
6. 四氟包覆O型圈規格表 -----	38-41
Size List of Encapsulated O-ring	
7. VP型特康泛塞密封件規格表 -----	42-44
Size List of VP Spring Energized PTFE Piston/Rod Seal	
7. VD型旋轉泛塞密封件規格表 -----	45-46
Size List of VD Spring Energized PTFE Rotary Seal	
9. HR型特康泛塞密封件規格表 -----	47-49
Size List of HR Spring Energized PTFE Flange Seal	
10. KDAS密封件規格表 -----	50-53
Size List of KDAS Double Acting Seal	

O型圈的介紹 Introductions of O-Ring




OR(O型圈)是通用密封，也是一種基礎密封件，不同工作環境選用不同材質，OR的尺寸取決於密封槽尺寸如附表。

OR is a universal seal. It is a basic seal as well. The "O" shape gave it the name. Different medium and usage require different material. Size of o-ring must depend on the groove dimension.

O型圈的密封原理


(1)O型圈的密封原理

O型圈的密封原理是被壓縮的O型圈通過維持反彈力而進行密封。

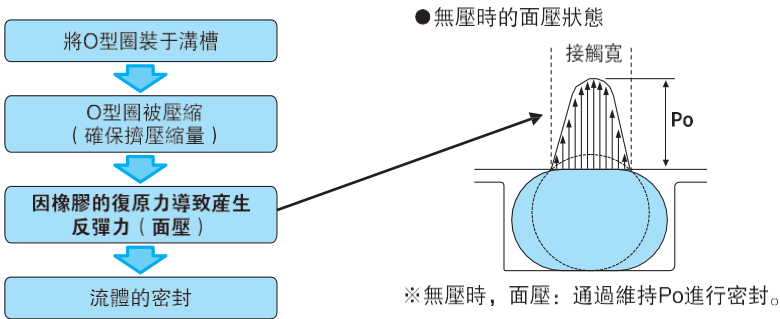

(2)O型圈用材料所要求的性質

O型圈通過擠壓產生的應力發揮密封性能，因此在不發生異常變形的範圍內，持有適度的應力是基本要求的性質。而且要求該基本性質在使用過程中也不失去。而具有這種性質的材料最合適的莫過於合成橡膠。但是，使一種材料具有所有這些性質是很困難的，因此需要根據用途分別使用相應的材料。

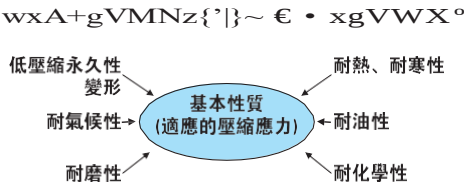

		Pressure 壓力 bar	橡膠邵氏硬度Hardness		
			70A	80A	90A
			最大擠出間隙F(mm)		
STATIC 靜態密封		≤60	0.2	0.25	0.3
		60-100	0.1	0.2	0.25
		100-160	0.05	0.1	0.2
		160-250		0.05	0.1
		250-350			0.05
DYNAMIC 動態密封		≤30	0.2	0.25	0.3
		30-60	1	0.17	0.2
		60-80		0.1	0.15
		80-100			0.1

O型圈公差表（單位：毫米）

Tolerance Instruction (mm)


內徑 ID	公差 Tolerance	綫徑 W	公差 Tolerance
0 ~ 3	0.14	0 ~ 1.8	0.08
3 ~ 6	0.15	1.8 ~ 2.6	0.09
6 ~ 10	0.17	2.6 ~ 3.5	0.10
10 ~ 18	0.20	3.5 ~ 5.3	0.13
18 ~ 30	0.30	5.3 ~ 7.0	0.15
30 ~ 50	0.40	7 ~ 8	0.17
50 ~ 80	0.65	8 ~ 10	0.20
80 ~ 100	0.85	10 ~ 15	0.25
100 ~ 120	1.0		
120 ~ 150	1.2		
150 ~ 180	1.4		
180 ~ 250	1.8		
250 ~ 300	2.1		
300 ~ 350	2.5		
350 ~ 400	2.8		
400 ~ 500	3.4		
500 ~ 650	4.3		
650 ~ 800	6.5		

耐溫性對比

Temperature Resistance

	-100℃	-50℃	0℃	50℃	100℃	150℃	200℃	250℃	300℃	350℃
全氟(FFKM)		-20℃								325℃
丁腈橡膠(NBR)		-50℃				135℃				
乙丙橡膠(EPDM)		-55℃				149℃				
氟橡膠(FKM)		-40℃						246℃		
硅橡膠(VMQ)		-70℃						232℃		
氟硅橡膠(FVMQ)		-65℃					177℃			

O-X型圈 日標P系列 O-X-Ring

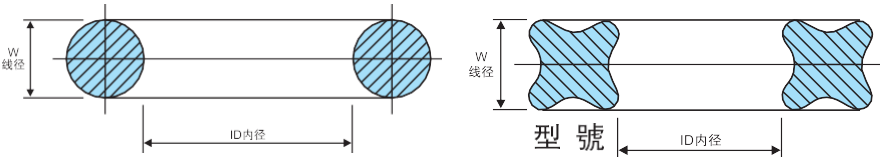


型號 Model Number	內徑 ID	綫徑 W
P-003	2.8	1.9
P-004	3.8	1.9
P-005	4.8	1.9
P-006	5.8	1.9
P-007	6.8	1.9
P-008	7.8	1.9
P-009	8.8	1.9
P-010	9.8	1.9
P-010A	9.8	2.4
P-011.2	11	2.4
P-012.5	12.3	2.4
P-011	10.8	2.4
P-012	11.8	2.4
P-014	13.8	2.4
P-015	14.8	2.4
P-016	15.8	2.4
P-017	16.8	2.4
P-018	17.8	2.4
P-019	18.8	2.4
P-020	19.8	2.4
P-021	20.8	2.4
P-022	21.8	2.4
P-022.4	22.1	3.5
P-022A	21.7	3.5
P-025.5	25.2	3.5
P-029.5	29.2	3.5
P-031.5	31.2	3.5
P-035.5	35.2	3.5

型號 Model Number	內徑 ID	綫徑 W
P-024	23.7	3.5
P-025	24.7	3.5
P-026	25.7	3.5
P-028	27.7	3.5
P-029	28.7	3.5
P-030	29.7	3.5
P-031	30.7	3.5
P-032	31.7	3.5
P-034	33.7	3.5
P-035	34.7	3.5
P-036	35.7	3.5
P-038	37.7	3.5
P-039	38.7	3.5
P-040	39.7	3.5
P-041	40.7	3.5
P-042	41.7	3.5
P-044	43.7	3.5
P-045	44.7	3.5
P-046	45.7	3.5
P-048	47.7	3.5
P-049	48.7	3.5
P-050	49.7	3.5
P-048A	47.6	5.7
P-050A	49.6	5.7
P-052	51.6	5.7
P-053	52.6	5.7
P-055	54.6	5.7
P-056	55.6	5.7

型號 Model Number	內徑 ID	綫徑 W
P-058	57.6	5.7
P-060	59.6	5.7
P-062	61.6	5.7
P-063	62.6	5.7
P-065	64.6	5.7
P-067	66.6	5.7
P-070	69.6	5.7
P-071	70.6	5.7
P-075	74.6	5.7
P-080	79.6	5.7
P-085	84.6	5.7
P-090	89.6	5.7
P-095	94.6	5.7
P-100	99.6	5.7
P-102	101.6	5.7
P-105	104.6	5.7
P-110	109.6	5.7
P-112	111.6	5.7
P-115	114.6	5.7
P-120	119.6	5.7
P-125	124.6	5.7
P-130	129.6	5.7
P-132	131.6	5.7
P-135	134.6	5.7
P-140	139.6	5.7
P-145	144.6	5.7
P-150	149.6	5.7
P-150A	149.5	8.4
P-155	154.5	8.4
P-160	159.5	8.4
P-165	164.5	8.4
P-170	169.5	8.4
P-175	174.5	8.4
P-180	179.5	8.4
P-185	184.5	8.4

型號 Model Number	內徑 ID	綫徑 W
P-190	189.5	8.4
P-195	194.5	8.4
P-200	199.5	8.4
P-205	204.5	8.4
P-209	208.5	8.4
P-210	209.5	8.4
P-215	214.5	8.4
P-220	219.5	8.4
P-225	224.5	8.4
P-230	229.5	8.4
P-235	234.5	8.4
P-240	239.5	8.4
P-245	244.5	8.4
P-250	249.5	8.4
P-255	254.5	8.4
P-260	259.5	8.4
P-265	264.5	8.4
P-270	269.5	8.4
P-275	274.5	8.4
P-280	279.5	8.4
P-285	284.5	8.4
P-290	289.5	8.4
P-295	294.5	8.4
P-300	299.5	8.4
P-315	314.5	8.4
P-320	319.5	8.4
P-335	334.5	8.4
P-340	339.5	8.4
P-355	354.5	8.4
P-360	359.5	8.4
P-375	375.5	8.4
P-385	384.5	8.4
P-400	399.5	8.4


O-X型圈 日標G系列 O-X-Ring

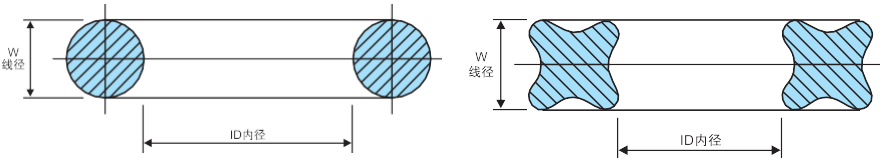

型號 Model Number	内徑 ID	綫徑 W
G-025	24.4	3.1
G-030	29.4	3.1
G-035	34.4	3.1
G-040	39.4	3.1
G-042	41.4	3.1
G-045	44.4	3.1
G-050	49.4	3.1
G-055	54.4	3.1
G-058	57.4	3.1
G-060	59.4	3.1
G-065	64.4	3.1
G-070	69.4	3.1
G-075	74.4	3.1
G-080	79.4	3.1
G-085	84.8	3.1
G-090	89.4	3.1
G-095	94.4	3.1
G-100	99.4	3.1
G-105	104.4	3.1
G-110	109.4	3.1
G-115	114.4	3.1
G-120	119.4	3.1
G-125	124.4	3.1
G-130	129.4	3.1
G-135	134.4	3.1
G-140	139.4	3.1
G-145	144.4	3.1
G-150	149.3	5.7
G-155	154.3	5.7

型號 Model Number	内徑 ID	綫徑 W
G-160	159.3	5.7
G-165	164.3	5.7
G-170	169.3	5.7
G-175	174.3	5.7
G-180	179.3	5.7
G-185	184.3	5.7
G-190	189.3	5.7
G-195	194.3	5.7
G-200	199.3	5.7
G-205	204.3	5.7
G-210	209.3	5.7
G-215	214.3	5.7
G-220	219.3	5.7
G-225	224.3	5.7
G-230	229.3	5.7
G-235	234.3	5.7
G-240	239.3	5.7
G-250	249.3	5.7
G-255	254.3	5.7
G-260	259.3	5.7
G-270	269.3	5.7
G-275	274.3	5.7
G-280	279.3	5.7
G-285	284.3	5.7
G-290	289.3	5.7
G-300	299.3	5.7
G-305	304.3	5.7
G-310	309.3	5.7

O-X型圈 美標AS568系列 O-X-Ring

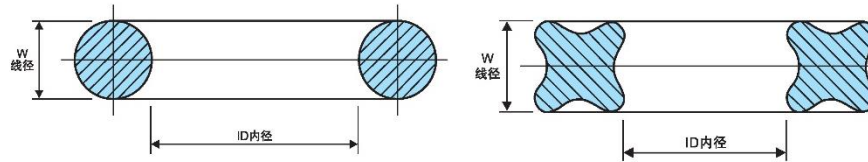

型號 Model Number	內徑 ID	綫徑 W
568-001	0.74	1.02
568-002	1.07	1.27
568-003	1.42	1.53
568-011A	8.73	1.78
568-004	1.78	1.78
568-005	2.57	1.78
568-006	2.9	1.78
568-007	3.68	1.78
568-008	4.47	1.78
568-009	5.28	1.78
568-010	6.07	1.78
568-011	7.65	1.78
568-012	9.25	1.78
568-013	10.82	1.78
568-014	12.42	1.78
568-015	14	1.78
568-016	15.6	1.78
568-017	17.17	1.78
568-018	18.77	1.78
568-019	20.35	1.78
568-020	21.95	1.78
568-021	23.52	1.78
568-022	25.12	1.78
568-023	26.7	1.78
568-024	28.3	1.78
568-025	29.87	1.78
568-026	31.47	1.78
568-027	33.05	1.78

型號 Model Number	內徑 ID	綫徑 W
568-028	34.65	1.78
568-029	37.82	1.78
568-030	41	1.78
568-031	44.17	1.78
568-032	47.35	1.78
568-033	50.52	1.78
568-034	53.7	1.78
568-035	56.78	1.78
568-036	60.05	1.78
568-037	63.32	1.78
568-038	66.4	1.78
568-039	69.57	1.78
568-040	72.75	1.78
568-041	75.75	1.78
568-042	82.27	1.78
568-043	88.62	1.78
568-044	94.97	1.78
568-045	101.32	1.78
568-046	107.67	1.78
568-047	114.02	1.78
568-048	120.37	1.78
568-049	126.72	1.78
568-050	133.07	1.78
568-102	1.25	2.62
568-103	2.06	2.62
568-104	2.85	2.62
568-105	3.63	2.62
568-106	4.42	2.62

型號 Model Number	內徑 ID	綫徑 W
568-107	5.23	2.62
568-108	6.02	2.62
568-109	7.6	2.62
568-110	9.2	2.62
568-111	10.77	2.62
568-112	12.37	2.62
568-113	13.95	2.62
568-114	15.55	2.62
568-115	17.12	2.62
568-116	18.72	2.62
568-117	20.3	2.62
568-118	21.9	2.62
568-119	23.47	2.62
568-120	25.07	2.62
568-121	26.65	2.62
568-122	28.25	2.62
568-123	29.82	2.62
568-124	31.42	2.62
568-125	33	2.62
568-126	34.6	2.62
568-127	36.17	2.62
568-128	37.77	2.62
568-129	39.35	2.62
568-130	40.95	2.62
568-131	42.52	2.62
568-132	44.12	2.62
568-133	45.7	2.62
568-134	47.3	2.62
568-135	48.9	2.62
568-136	50.47	2.62
568-137	52.07	2.62
568-138	53.64	2.62
568-139	55.25	2.62
568-140	56.82	2.62
568-141	58.42	2.62

型號 Model Number	內徑 ID	綫徑 W
568-142	59.99	2.62
568-143	61.6	2.62
568-144	63.17	2.62
568-145	64.77	2.62
568-146	66.34	2.62
568-147	67.95	2.62
568-148	69.52	2.62
568-149	71.12	2.62
568-150	72.69	2.62
568-151	75.87	2.62
568-152	82.22	2.62
568-153	88.57	2.62
568-154	94.92	2.62
568-155	101.27	2.62
568-156	107.62	2.62
568-157	113.97	2.62
568-158	120.32	2.62
568-159	126.67	2.62
568-160	133.02	2.62
568-161	139.37	2.62
568-162	145.72	2.62
568-163	152.07	2.62
568-164	158.42	2.62
568-165	164.77	2.62
568-166	171.12	2.62
568-167	177.47	2.62
568-168	183.82	2.62
568-169	190.17	2.62
568-170	196.52	2.62
568-171	202.87	2.62
568-172	209.22	2.62
568-173	215.57	2.62
568-174	221.92	2.62
568-175	228.27	2.62
568-176	234.62	2.62

型號 Model Number	內徑 ID	綫徑 W
568-177	240.97	2.62
568-178	247.32	2.62
568-179	253.67	2.62
568-201	4.34	3.53
568-202	5.94	3.53
568-203	7.52	3.53
568-204	9.12	3.53
568-205	10.69	3.53
568-206	12.29	3.53
568-207	13.87	3.53
568-208	15.47	3.53
568-209	17.04	3.53
568-210	18.64	3.53
568-211	20.22	3.53
568-212	21.82	3.53
568-213	23.39	3.53
568-214	24.99	3.53
568-215	26.57	3.53
568-216	28.17	3.53
568-217	29.74	3.53
568-218	31.34	3.53
568-219	32.92	3.53
568-220	34.52	3.53
568-221	36.09	3.53
568-222	37.69	3.53
568-223	40.87	3.53
568-224	44.04	3.53
568-225	47.22	3.53
568-226	50.39	3.53
568-227	53.57	3.53
568-228	56.75	3.53
568-229	59.92	3.53
568-230	63.09	3.53
568-231	66.27	3.53
568-232	69.44	3.53

型號 Model Number	內徑 ID	綫徑 W
568-233	72.62	3.53
568-234	75.8	3.53
568-235	78.97	3.53
568-236	82.14	3.53
568-237	85.32	3.53
568-238	88.49	3.53
568-239	91.67	3.53
568-240	94.87	3.53
568-241	98.02	3.53
568-242	101.2	3.53
568-243	104.37	3.53
568-244	107.54	3.53
568-245	110.72	3.53
568-246	113.89	3.53
568-247	117.07	3.53
568-248	120.07	3.53
568-249	123.42	3.53
568-250	126.59	3.53
568-251	129.77	3.53
568-252	132.94	3.53
568-253	136.12	3.53
568-254	139.29	3.53
568-255	142.47	3.53
568-256	145.64	3.53
568-257	148.82	3.53
568-258	151.99	3.53
568-259	158.34	3.53
568-260	164.69	3.53
568-261	171.04	3.53
568-262	177.39	3.53
568-263	183.74	3.53
568-264	190.09	3.53
568-265	196.44	3.53
568-266	202.79	3.53
568-267	209.14	3.53


型號 Model Number	內徑 ID	綫徑 W
568-268	215.49	3.53
568-269	221.84	3.53
568-270	228.19	3.53
568-271	234.54	3.53
568-272	240.89	3.53
568-273	247.24	3.53
568-274	253.59	3.53
568-275	266.29	3.53
568-276	278.99	3.53
568-277	291.69	3.53
568-278	304.39	3.53
568-279	329.79	3.53
568-280	355.19	3.53
568-281	380.59	3.53
568-282	405.26	3.53
568-283	430.66	3.53
568-284	456.06	3.53
568-309	10.46	5.34
568-310	12.07	5.34
568-311	13.64	5.34
568-312	15.24	5.34
568-313	16.81	5.34
568-314	18.42	5.34
568-315	19.99	5.34
568-316	21.59	5.34
568-317	23.17	5.34
568-318	24.77	5.34
568-319	26.34	5.34
568-320	27.94	5.34
568-321	29.51	5.34
568-322	31.12	5.34
568-323	32.69	5.34
568-324	34.29	5.34
568-325	37.47	5.34
568-326	40.64	5.34

型號 Model Number	內徑 ID	綫徑 W
568-327	43.82	5.34
568-328	46.99	5.34
568-329	50.17	5.34
568-330	53.34	5.34
568-331	56.52	5.34
568-332	59.69	5.34
568-333	62.87	5.34
568-334	66.04	5.34
568-335	69.22	5.34
568-336	72.39	5.34
568-337	75.57	5.34
568-338	78.74	5.34
568-339	81.92	5.34
568-340	85.09	5.34
568-341	88.27	5.34
568-342	91.44	5.34
568-343	94.62	5.34
568-344	97.79	5.34
568-345	100.97	5.34
568-346	104.14	5.34
568-347	107.32	5.34
568-348	110.49	5.34
568-349	113.67	5.34
568-350	116.84	5.34
568-351	120.02	5.34
568-352	123.19	5.34
568-353	126.37	5.34
568-354	129.54	5.34
568-355	132.72	5.34
568-356	135.89	5.34
568-357	139.07	5.34
568-358	142.24	5.34
568-359	145.42	5.34
568-360	148.59	5.34
568-361	151.77	5.34

型號 Model Number	內徑 ID	綫徑 W
568-362	158.12	5.34
568-363	164.47	5.34
568-364	170.82	5.34
568-365	177.17	5.34
568-366	183.52	5.34
568-367	189.87	5.34
568-368	196.22	5.34
568-369	202.57	5.34
568-370	208.92	5.34
568-371	215.27	5.34
568-372	221.62	5.34
568-373	227.97	5.34
568-374	234.32	5.34
568-375	240.67	5.34
568-376	247.02	5.34
568-377	253.37	5.34
568-378	266.07	5.34
568-379	278.77	5.34
568-380	291.47	5.34
568-381	304.17	5.34
568-382	329.57	5.34
568-383	354.97	5.34
568-384	380.37	5.34
568-385	405.26	5.34
568-386	430.66	5.34
568-387	456.06	5.34
568-388	481.46	5.34
568-389	506.86	5.34
568-390	532.26	5.34
568-391	557.66	5.34
568-392	582.68	5.34
568-393	608.08	5.34
568-394	633.48	5.34
568-395	658.88	5.34
568-425	113.67	6.99

型號 Model Number	內徑 ID	綫徑 W
568-426	116.84	6.99
568-427	120.02	6.99
568-428	123.19	6.99
568-429	126.37	6.99
568-430	129.54	6.99
568-431	132.54	6.99
568-432	135.89	6.99
568-433	139.07	6.99
568-434	142.24	6.99
568-435	145.42	6.99
568-436	148.59	6.99
568-437	151.77	6.99
568-438	158.12	6.99
568-439	164.47	6.99
568-440	170.82	6.99
568-441	177.17	6.99
568-442	183.52	6.99
568-443	189.87	6.99
568-444	196.22	6.99
568-445	202.57	6.99
568-446	215.27	6.99
568-447	227.97	6.99
568-448	240.67	6.99
568-449	253.37	6.99
568-450	266.07	6.99
568-451	278.77	6.99
568-452	291.47	6.99
568-453	304.17	6.99
568-454	316.87	6.99
568-455	329.57	6.99
568-456	342.27	6.99
568-457	354.97	6.99
568-458	367.67	6.99
568-459	380.37	6.99
568-460	393.07	6.99

O-X型圈 O-X-Ring

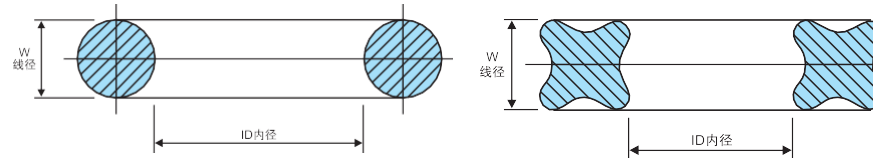

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
29.00	0.50	11.30	1.00	38.00	1.00
10.50	0.65	11.50	1.00	39.00	1.00
1.00	1.00	12.00	1.00	40.00	1.00
1.20	1.00	13.00	1.00	41.00	1.00
1.60	1.00	14.00	1.00	42.00	1.00
1.70	1.00	15.00	1.00	43.00	1.00
1.80	1.00	15.50	1.00	44.00	1.00
2.00	1.00	16.00	1.00	45.00	1.00
2.20	1.00	16.50	1.00	46.00	1.00
2.60	1.00	17.00	1.00	47.00	1.00
2.90	1.00	17.50	1.00	48.00	1.00
3.00	1.00	17.60	1.00	49.00	1.00
3.50	1.00	18.00	1.00	50.00	1.00
4.00	1.00	18.50	1.00	51.00	1.00
4.50	1.00	19.00	1.00	52.00	1.00
5.00	1.00	20.00	1.00	53.00	1.00
5.20	1.00	23.00	1.00	53.28	1.00
5.50	1.00	24.00	1.00	55.00	1.00
6.00	1.00	25.00	1.00	56.00	1.00
6.50	1.00	26.00	1.00	57.00	1.00
7.00	1.00	27.00	1.00	58.00	1.00
7.50	1.00	28.00	1.00	59.00	1.00
8.00	1.00	29.00	1.00	60.00	1.00
8.50	1.00	30.00	1.00	61.00	1.00
9.50	1.00	34.00	1.00	90.00	1.00
10.00	1.00	35.00	1.00	139.35	1.00
10.50	1.00	36.00	1.00	285.00	1.00
11.00	1.00	37.00	1.00	323.00	1.00

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
5.00	1.20	17.00	1.50	57.00	1.50
9.60	1.20	18.00	1.50	58.00	1.50
1.00	1.50	18.50	1.50	59.00	1.50
1.50	1.50	19.00	1.50	60.00	1.50
2.00	1.50	19.50	1.50	62.00	1.50
2.50	1.50	20.00	1.50	65.00	1.50
2.60	1.50	20.50	1.50	67.00	1.50
2.90	1.50	21.00	1.50	70.00	1.50
3.00	1.50	21.50	1.50	72.00	1.50
3.50	1.50	22.00	1.50	74.00	1.50
4.00	1.50	22.50	1.50	76.00	1.50
4.50	1.50	23.00	1.50	78.00	1.50
5.00	1.50	23.50	1.50	80.00	1.50
5.50	1.50	24.00	1.50	83.00	1.50
5.70	1.50	24.50	1.50	90.00	1.50
6.00	1.50	25.00	1.50	94.00	1.50
6.50	1.50	26.00	1.50	100.00	1.50
7.50	1.50	26.50	1.50	104.00	1.50
8.00	1.50	27.00	1.50	110.00	1.50
9.00	1.50	27.50	1.50	139.35	1.50
9.50	1.50	28.00	1.50	180.00	1.50
10.00	1.50	29.00	1.50	8.55	1.58
10.50	1.50	30.00	1.50	11.08	1.58
10.70	1.50	31.50	1.50	2.40	1.60
11.00	1.50	33.00	1.50	6.10	1.60
11.50	1.50	35.00	1.50	8.10	1.60
12.00	1.50	36.00	1.50	12.00	1.60
12.50	1.50	37.00	1.50	6.07	1.63
13.00	1.50	40.00	1.50	13.00	1.70
14.00	1.50	43.00	1.50	3.68	1.78
14.50	1.50	45.00	1.50	8.73	1.78
15.00	1.50	47.00	1.50	9.25	1.78
15.50	1.50	52.00	1.50	9.75	1.78
16.00	1.50	53.00	1.50	12.42	1.78
16.50	1.50	55.00	1.50	17.17	1.78

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
28.30	1.78	9.50	1.80	38.70	1.80
56.87	1.78	10.00	1.80	39.50	1.80
64.40	1.78	10.40	1.80	40.00	1.80
82.27	1.78	10.60	1.80	41.20	1.80
85.00	1.78	10.80	1.80	42.50	1.80
101.32	1.78	11.20	1.80	43.70	1.80
123.44	1.78	11.50	1.80	45.00	1.80
126.72	1.78	11.80	1.80	46.20	1.80
1.80	1.80	12.00	1.80	47.50	1.80
2.00	1.80	12.50	1.80	48.00	1.80
2.24	1.80	13.20	1.80	48.70	1.80
2.50	1.80	14.00	1.80	50.00	1.80
2.80	1.80	15.00	1.80	53.00	1.80
3.15	1.80	16.00	1.80	55.00	1.80
3.55	1.80	17.00	1.80	56.00	1.80
3.75	1.80	18.00	1.80	59.40	1.80
4.00	1.80	19.00	1.80	63.00	1.80
4.50	1.80	20.00	1.80	65.00	1.80
4.87	1.80	21.20	1.80	69.00	1.80
5.00	1.80	21.40	1.80	71.00	1.80
5.15	1.80	22.40	1.80	73.00	1.80
5.30	1.80	23.60	1.80	74.00	1.80
5.60	1.80	25.00	1.80	75.00	1.80
6.00	1.80	25.80	1.80	79.00	1.80
6.30	1.80	26.50	1.80	85.00	1.80
6.70	1.80	28.00	1.80	86.00	1.80
6.90	1.80	29.00	1.80	90.00	1.80
7.10	1.80	30.00	1.80	97.00	1.80
7.50	1.80	31.50	1.80	100.00	1.80
8.00	1.80	32.50	1.80	109.00	1.80
8.40	1.80	33.50	1.80	115.00	1.80
8.50	1.80	34.50	1.80	350.00	1.80
8.75	1.80	35.50	1.80	1.20	1.90
9.00	1.80	36.50	1.80	2.20	1.90
9.28	1.80	37.50	1.80	2.70	1.90

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
2.80	1.90	11.20	1.90	31.20	1.90
3.20	1.90	11.50	1.90	32.20	1.90
3.40	1.90	12.00	1.90	33.20	1.90
3.50	1.90	12.20	1.90	34.20	1.90
3.70	1.90	12.50	1.90	35.20	1.90
3.80	1.90	13.00	1.90	36.20	1.90
3.90	1.90	13.20	1.90	37.20	1.90
4.20	1.90	13.80	1.90	38.20	1.90
4.90	1.90	14.00	1.90	39.20	1.90
5.00	1.90	14.20	1.90	40.20	1.90
5.20	1.90	14.80	1.90	41.20	1.90
5.70	1.90	15.20	1.90	42.20	1.90
6.00	1.90	15.80	1.90	45.20	1.90
6.20	1.90	16.20	1.90	46.20	1.90
6.40	1.90	16.80	1.90	61.20	1.90
6.70	1.90	17.00	1.90	75.00	1.90
6.80	1.90	17.20	1.90	96.20	1.90
7.00	1.90	17.80	1.90	11.89	1.98
7.20	1.90	18.00	1.90	2.50	2.00
7.70	1.90	18.20	1.90	3.00	2.00
7.80	1.90	18.80	1.90	4.00	2.00
8.00	1.90	19.20	1.90	4.50	2.00
8.20	1.90	20.00	1.90	6.00	2.00
8.50	1.90	20.20	1.90	6.50	2.00
8.70	1.90	21.20	1.90	7.00	2.00
8.80	1.90	22.20	1.90	7.50	2.00
8.90	1.90	23.20	1.90	8.00	2.00
9.00	1.90	24.20	1.90	8.50	2.00
9.20	1.90	25.20	1.90	9.00	2.00
9.55	1.90	26.20	1.90	10.00	2.00
9.80	1.90	27.20	1.90	11.00	2.00
10.00	1.90	28.00	1.90	11.50	2.00
10.20	1.90	28.20	1.90	12.00	2.00
10.60	1.90	29.20	1.90	12.20	2.00
10.80	1.90	30.20	1.90	13.00	2.00

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
13.50	2.00	44.50	2.00	95.00	2.00
14.00	2.00	46.00	2.00	96.00	2.00
15.00	2.00	47.00	2.00	98.00	2.00
15.50	2.00	48.00	2.00	102.00	2.00
16.00	2.00	49.50	2.00	104.50	2.00
16.50	2.00	52.50	2.00	105.00	2.00
17.00	2.00	53.00	2.00	106.00	2.00
17.50	2.00	54.50	2.00	109.50	2.00
19.00	2.00	55.00	2.00	110.00	2.00
21.00	2.00	55.50	2.00	115.00	2.00
22.00	2.00	56.00	2.00	118.00	2.00
23.00	2.00	59.00	2.00	120.00	2.00
23.50	2.00	60.00	2.00	128.00	2.00
24.00	2.00	62.00	2.00	129.50	2.00
24.50	2.00	62.50	2.00	130.00	2.00
25.00	2.00	64.50	2.00	132.00	2.00
26.00	2.00	65.00	2.00	149.50	2.00
27.00	2.00	67.00	2.00	150.00	2.00
28.00	2.00	68.00	2.00	160.00	2.00
28.50	2.00	69.50	2.00	165.00	2.00
30.00	2.00	70.00	2.00	170.00	2.00
31.00	2.00	70.50	2.00	180.00	2.00
32.00	2.00	71.00	2.00	184.00	2.00
33.00	2.00	72.00	2.00	185.00	2.00
34.50	2.00	73.00	2.00	190.00	2.00
35.00	2.00	74.50	2.00	192.00	2.00
36.00	2.00	75.00	2.00	205.00	2.00
37.50	2.00	76.00	2.00	233.00	2.00
38.50	2.00	78.00	2.00	13.46	2.08
39.00	2.00	79.50	2.00	8.00	2.20
39.50	2.00	80.00	2.00	9.30	2.20
41.50	2.00	84.50	2.00	11.20	2.20
42.00	2.00	89.50	2.00	11.30	2.20
43.00	2.00	90.00	2.00	13.00	2.20
44.00	2.00	94.50	2.00	13.30	2.20

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
15.30	2.20	11.60	2.40	19.60	2.40
19.30	2.20	11.80	2.40	19.80	2.40
16.36	2.21	12.00	2.40	20.00	2.40
53.00	2.30	12.20	2.40	20.20	2.40
3.20	2.40	12.60	2.40	20.30	2.40
3.30	2.40	12.80	2.40	20.60	2.40
4.20	2.40	13.20	2.40	21.00	2.40
5.20	2.40	13.30	2.40	21.20	2.40
5.50	2.40	13.60	2.40	21.60	2.40
5.60	2.40	13.80	2.40	21.80	2.40
6.20	2.40	14.00	2.40	22.00	2.40
6.30	2.40	14.20	2.40	22.20	2.40
6.50	2.40	14.30	2.40	22.30	2.40
6.60	2.40	14.60	2.40	22.60	2.40
7.10	2.40	15.00	2.40	23.00	2.40
7.20	2.40	15.20	2.40	23.20	2.40
7.60	2.40	15.30	2.40	24.00	2.40
8.20	2.40	15.60	2.40	24.20	2.40
8.30	2.40	15.80	2.40	24.50	2.40
8.40	2.40	16.00	2.40	24.60	2.40
8.50	2.40	16.20	2.40	24.80	2.40
8.60	2.40	16.30	2.40	25.20	2.40
8.80	2.40	16.60	2.40	25.60	2.40
9.00	2.40	16.80	2.40	26.00	2.40
9.20	2.40	17.00	2.40	26.20	2.40
9.30	2.40	17.20	2.40	26.40	2.40
9.40	2.40	17.30	2.40	26.80	2.40
9.60	2.40	17.60	2.40	27.00	2.40
9.80	2.40	17.80	2.40	27.20	2.40
10.00	2.40	18.00	2.40	27.60	2.40
10.20	2.40	18.20	2.40	28.00	2.40
10.80	2.40	18.30	2.40	28.20	2.40
11.00	2.40	18.60	2.40	28.80	2.40
11.20	2.40	19.00	2.40	29.00	2.40
11.30	2.40	19.20	2.40	29.20	2.40

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
29.60	2.40	55.20	2.40	26.00	2.50
30.00	2.40	59.60	2.40	27.00	2.50
30.20	2.40	60.20	2.40	28.00	2.50
31.20	2.40	61.20	2.40	30.00	2.50
31.80	2.40	62.20	2.40	32.00	2.50
32.20	2.40	62.60	2.40	34.00	2.50
32.60	2.40	64.60	2.40	36.00	2.50
33.20	2.40	65.20	2.40	38.00	2.50
33.30	2.40	66.60	2.40	38.30	2.50
34.00	2.40	70.60	2.40	39.00	2.50
34.20	2.40	105.20	2.40	40.00	2.50
34.30	2.40	19.18	2.46	42.00	2.50
35.20	2.40	5.00	2.50	44.00	2.50
37.20	2.40	8.00	2.50	45.00	2.50
38.00	2.40	8.50	2.50	48.00	2.50
38.20	2.40	9.00	2.50	50.00	2.50
39.50	2.40	9.50	2.50	55.00	2.50
39.70	2.40	10.00	2.50	57.00	2.50
40.00	2.40	11.00	2.50	60.00	2.50
40.20	2.40	12.00	2.50	62.00	2.50
42.00	2.40	12.50	2.50	65.00	2.50
42.20	2.40	13.00	2.50	70.00	2.50
43.00	2.40	13.80	2.50	72.00	2.50
44.00	2.40	14.00	2.50	75.00	2.50
44.70	2.40	15.00	2.50	80.00	2.50
45.20	2.40	17.00	2.50	90.00	2.50
45.60	2.40	18.00	2.50	94.00	2.50
47.00	2.40	19.00	2.50	115.00	2.50
47.20	2.40	20.00	2.50	124.00	2.50
48.00	2.40	20.50	2.50	125.00	2.50
49.20	2.40	21.00	2.50	130.00	2.50
49.60	2.40	23.00	2.50	195.00	2.50
52.60	2.40	23.50	2.50	320.00	2.50
53.60	2.40	24.00	2.50	14.20	2.55
54.60	2.40	25.00	2.50	5.80	2.60

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
2.05	2.62	8.75	2.65	34.70	2.65
11.91	2.62	9.00	2.65	35.50	2.65
15.54	2.62	9.50	2.65	36.50	2.65
17.12	2.62	10.00	2.65	37.50	2.65
23.47	2.62	10.60	2.65	38.50	2.65
28.24	2.62	11.20	2.65	38.70	2.65
29.82	2.62	11.80	2.65	40.00	2.65
32.99	2.62	12.00	2.65	41.20	2.65
34.42	2.62	12.50	2.65	42.50	2.65
34.59	2.62	13.00	2.65	43.70	2.65
36.17	2.62	13.20	2.65	45.00	2.65
39.34	2.62	13.95	2.65	46.20	2.65
40.94	2.62	14.00	2.65	47.50	2.65
42.52	2.62	15.00	2.65	48.70	2.65
45.69	2.62	15.70	2.65	49.40	2.65
48.90	2.62	16.00	2.65	50.00	2.65
71.62	2.62	17.00	2.65	50.50	2.65
74.00	2.62	18.00	2.65	51.50	2.65
99.00	2.62	19.00	2.65	53.00	2.65
139.37	2.62	20.00	2.65	54.50	2.65
151.00	2.62	20.83	2.65	56.00	2.65
181.00	2.62	21.20	2.65	58.00	2.65
183.20	2.62	22.40	2.65	60.00	2.65
196.52	2.62	23.60	2.65	61.50	2.65
202.87	2.62	25.00	2.65	63.00	2.65
206.00	2.62	25.80	2.65	64.60	2.65
221.92	2.62	26.50	2.65	65.00	2.65
231.00	2.62	28.00	2.65	67.00	2.65
256.00	2.62	28.50	2.65	69.00	2.65
281.00	2.62	30.00	2.65	70.00	2.65
321.00	2.62	31.00	2.65	71.00	2.65
7.10	2.65	31.50	2.65	73.00	2.65
7.50	2.65	32.50	2.65	74.00	2.65
8.00	2.65	33.50	2.65	75.00	2.65
8.50	2.65	34.50	2.65	77.50	2.65

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
80.00	2.65	19.00	2.70	35.00	3.00
82.50	2.65	2.00	2.80	36.00	3.00
85.00	2.65	17.00	2.80	37.46	3.00
87.50	2.65	23.60	2.90	38.00	3.00
90.00	2.65	26.60	2.90	40.00	3.00
95.00	2.65	29.60	2.90	41.20	3.00
100.00	2.65	34.60	2.90	42.00	3.00
103.00	2.65	38.60	2.90	42.20	3.00
106.00	2.65	44.60	2.90	44.00	3.00
109.00	2.65	56.60	2.90	45.00	3.00
112.00	2.65	23.47	2.95	46.00	3.00
115.00	2.65	34.42	2.95	47.00	3.00
118.00	2.65	3.00	3.00	48.00	3.00
120.00	2.65	8.00	3.00	49.00	3.00
125.00	2.65	11.00	3.00	50.00	3.00
128.00	2.65	11.50	3.00	51.00	3.00
132.00	2.65	13.00	3.00	52.00	3.00
136.00	2.65	15.00	3.00	53.00	3.00
140.00	2.65	16.00	3.00	54.00	3.00
145.00	2.65	18.00	3.00	54.50	3.00
150.00	2.65	18.50	3.00	55.00	3.00
155.00	2.65	19.00	3.00	56.00	3.00
160.00	2.65	19.20	3.00	57.00	3.00
165.00	2.65	20.00	3.00	60.00	3.00
170.00	2.65	22.00	3.00	62.00	3.00
175.00	2.65	24.00	3.00	63.00	3.00
180.00	2.65	24.20	3.00	64.50	3.00
195.00	2.65	25.00	3.00	67.00	3.00
200.00	2.65	26.00	3.00	68.00	3.00
212.00	2.65	27.00	3.00	70.00	3.00
270.00	2.65	28.00	3.00	70.50	3.00
280.00	2.65	30.00	3.00	72.00	3.00
330.00	2.65	33.00	3.00	75.00	3.00
10.50	2.70	34.00	3.00	78.00	3.00
13.60	2.70	34.50	3.00	79.00	3.00

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
79.50	3.00	146.00	3.00	274.00	3.00
80.00	3.00	148.00	3.00	275.00	3.00
81.50	3.00	149.50	3.00	279.00	3.00
82.00	3.00	150.00	3.00	280.00	3.00
84.00	3.00	155.00	3.00	285.00	3.00
85.00	3.00	159.50	3.00	300.00	3.00
89.00	3.00	160.00	3.00	306.00	3.00
89.50	3.00	164.00	3.00	330.00	3.00
90.00	3.00	165.00	3.00	370.00	3.00
90.40	3.00	167.00	3.00	374.00	3.00
95.00	3.00	170.00	3.00	395.00	3.00
98.00	3.00	174.00	3.00	460.00	3.00
99.50	3.00	175.00	3.00	475.00	3.00
100.00	3.00	176.50	3.00	675.00	3.00
102.00	3.00	178.00	3.00	3.80	3.10
104.00	3.00	180.00	3.00	4.80	3.10
105.00	3.00	182.00	3.00	5.80	3.10
106.00	3.00	192.00	3.00	6.80	3.10
110.00	3.00	194.50	3.00	7.80	3.10
112.00	3.00	195.00	3.00	8.80	3.10
114.00	3.00	200.00	3.00	9.80	3.10
115.00	3.00	203.00	3.00	10.80	3.10
119.00	3.00	205.00	3.00	11.80	3.10
120.00	3.00	210.00	3.00	12.80	3.10
122.00	3.00	225.00	3.00	13.80	3.10
125.00	3.00	229.50	3.00	14.80	3.10
128.00	3.00	230.00	3.00	15.80	3.10
129.50	3.00	233.00	3.00	16.80	3.10
130.00	3.00	235.00	3.00	17.80	3.10
132.00	3.00	245.00	3.00	18.80	3.10
135.00	3.00	250.00	3.00	19.80	3.10
140.00	3.00	260.00	3.00	21.80	3.10
142.00	3.00	264.00	3.00	22.80	3.10
144.50	3.00	265.00	3.00	23.80	3.10
145.00	3.00	270.00	3.00	24.00	3.10

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
24.40	3.10	44.80	3.10	74.40	3.10
24.80	3.10	45.00	3.10	75.00	3.10
25.00	3.10	45.80	3.10	78.80	3.10
25.80	3.10	47.80	3.10	80.00	3.10
26.80	3.10	48.80	3.10	83.80	3.10
27.00	3.10	49.80	3.10	84.40	3.10
27.80	3.10	50.00	3.10	88.80	3.10
28.00	3.10	50.80	3.10	89.40	3.10
28.80	3.10	51.00	3.10	90.50	3.10
29.00	3.10	51.80	3.10	93.80	3.10
29.40	3.10	52.00	3.10	94.40	3.10
29.80	3.10	52.80	3.10	98.80	3.10
30.00	3.10	53.80	3.10	99.40	3.10
30.80	3.10	54.40	3.10	103.80	3.10
31.80	3.10	55.00	3.10	104.40	3.10
32.00	3.10	55.80	3.10	105.00	3.10
33.30	3.10	56.80	3.10	108.80	3.10
33.80	3.10	58.80	3.10	109.40	3.10
34.00	3.10	59.40	3.10	113.80	3.10
34.40	3.10	60.00	3.10	114.40	3.10
34.50	3.10	60.40	3.10	118.80	3.10
34.80	3.10	61.80	3.10	119.40	3.10
35.00	3.10	63.00	3.10	120.00	3.10
35.80	3.10	63.80	3.10	123.80	3.10
36.80	3.10	64.40	3.10	124.40	3.10
37.80	3.10	64.50	3.10	128.80	3.10
38.00	3.10	65.00	3.10	130.00	3.10
38.80	3.10	65.80	3.10	133.80	3.10
39.40	3.10	68.00	3.10	134.40	3.10
40.00	3.10	68.80	3.10	138.80	3.10
41.80	3.10	69.40	3.10	139.40	3.10
42.80	3.10	70.00	3.10	140.00	3.10
43.80	3.10	71.80	3.10	143.80	3.10
44.00	3.10	72.00	3.10	144.40	3.10
44.40	3.10	73.80	3.10	147.80	3.10

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
148.80	3.10	294.10	3.10	30.70	3.50
150.00	3.10	325.00	3.10	31.00	3.50
153.80	3.10	329.30	3.10	31.50	3.50
155.00	3.10	330.00	3.10	32.00	3.50
158.80	3.10	76.00	3.20	32.70	3.50
159.80	3.10	101.36	3.20	33.00	3.50
160.00	3.10	152.00	3.20	33.70	3.50
163.80	3.10	8.25	3.25	34.00	3.50
164.40	3.10	84.40	3.30	35.00	3.50
170.00	3.10	23.39	3.35	35.70	3.50
173.80	3.10	8.00	3.50	37.00	3.50
174.30	3.10	10.00	3.50	37.70	3.50
178.80	3.10	14.00	3.50	38.00	3.50
180.00	3.10	15.00	3.50	38.70	3.50
183.80	3.10	17.00	3.50	39.00	3.50
185.00	3.10	19.70	3.50	40.00	3.50
188.80	3.10	20.00	3.50	40.70	3.50
189.30	3.10	21.00	3.50	41.00	3.50
193.80	3.10	21.70	3.50	41.70	3.50
194.30	3.10	22.00	3.50	42.00	3.50
194.50	3.10	22.10	3.50	44.70	3.50
198.80	3.10	23.00	3.50	45.00	3.50
199.40	3.10	23.70	3.50	47.00	3.50
203.80	3.10	24.00	3.50	47.70	3.50
208.80	3.10	24.70	3.50	48.00	3.50
213.80	3.10	24.80	3.50	49.00	3.50
223.80	3.10	25.00	3.50	49.70	3.50
233.80	3.10	25.70	3.50	50.00	3.50
238.80	3.10	26.00	3.50	51.00	3.50
240.00	3.10	27.70	3.50	53.00	3.50
242.00	3.10	28.00	3.50	55.00	3.50
243.80	3.10	29.00	3.50	56.00	3.50
253.80	3.10	29.50	3.50	58.00	3.50
255.00	3.10	29.70	3.50	60.00	3.50
263.80	3.10	30.00	3.50	61.00	3.50

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
63.00	3.50	155.00	3.50	49.00	3.53
64.60	3.50	163.00	3.50	49.21	3.53
68.00	3.50	165.00	3.50	50.39	3.53
70.00	3.50	170.00	3.50	51.00	3.53
73.00	3.50	174.00	3.50	52.39	3.53
75.00	3.50	180.00	3.50	53.19	3.53
78.00	3.50	185.00	3.50	56.75	3.53
83.00	3.50	190.00	3.50	63.09	3.53
84.00	3.50	193.00	3.50	63.82	3.53
85.00	3.50	195.00	3.50	65.09	3.53
90.00	3.50	200.00	3.50	69.45	3.53
91.00	3.50	205.00	3.50	72.86	3.53
92.00	3.50	210.00	3.50	75.79	3.53
93.00	3.50	215.00	3.50	75.80	3.53
94.60	3.50	255.00	3.50	85.30	3.53
95.00	3.50	273.00	3.50	85.32	3.53
100.00	3.50	274.00	3.50	88.49	3.53
103.00	3.50	300.00	3.50	94.84	3.53
105.00	3.50	320.00	3.50	100.72	3.53
109.60	3.50	360.00	3.50	101.20	3.53
110.00	3.50	419.00	3.50	113.89	3.53
114.70	3.50	18.00	3.53	123.42	3.53
118.00	3.50	23.39	3.53	132.94	3.53
120.00	3.50	23.40	3.53	133.00	3.53
123.00	3.50	24.13	3.53	155.00	3.53
124.60	3.50	25.00	3.53	177.40	3.53
129.60	3.50	25.80	3.53	183.74	3.53
130.00	3.50	28.17	3.53	187.50	3.53
133.00	3.50	36.10	3.53	202.79	3.53
134.50	3.50	37.69	3.53	234.55	3.53
140.00	3.50	40.87	3.53	247.24	3.53
143.00	3.50	44.04	3.53	266.29	3.53
144.70	3.50	47.20	3.53	338.40	3.53
149.70	3.50	47.22	3.53	8.00	3.55
153.00	3.50	48.85	3.53	9.00	3.55

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
10.00	3.55	43.70	3.55	103.00	3.55
11.00	3.55	45.00	3.55	106.00	3.55
12.00	3.55	46.20	3.55	109.00	3.55
13.00	3.55	47.50	3.55	112.00	3.55
14.00	3.55	48.50	3.55	115.00	3.55
15.00	3.55	48.70	3.55	118.00	3.55
16.00	3.55	50.00	3.55	120.00	3.55
17.00	3.55	51.50	3.55	122.00	3.55
18.00	3.55	53.00	3.55	123.00	3.55
19.00	3.55	54.50	3.55	124.60	3.55
20.00	3.55	55.56	3.55	125.00	3.55
21.20	3.55	56.00	3.55	128.00	3.55
22.40	3.55	58.00	3.55	132.00	3.55
23.60	3.55	60.00	3.55	136.00	3.55
24.30	3.55	61.50	3.55	140.00	3.55
25.00	3.55	63.00	3.55	145.00	3.55
25.80	3.55	65.00	3.55	147.90	3.55
26.50	3.55	67.00	3.55	150.00	3.55
28.00	3.55	68.00	3.55	153.00	3.55
28.50	3.55	69.00	3.55	155.00	3.55
30.00	3.55	71.00	3.55	160.00	3.55
31.50	3.55	72.00	3.55	165.00	3.55
32.50	3.55	73.00	3.55	170.00	3.55
33.50	3.55	75.00	3.55	175.00	3.55
34.50	3.55	77.50	3.55	180.00	3.55
35.00	3.55	80.00	3.55	182.00	3.55
35.50	3.55	82.50	3.55	185.00	3.55
36.50	3.55	85.00	3.55	188.00	3.55
37.50	3.55	87.50	3.55	190.00	3.55
38.00	3.55	90.00	3.55	195.00	3.55
38.70	3.55	92.50	3.55	200.00	3.55
40.00	3.55	95.00	3.55	206.00	3.55
41.20	3.55	97.50	3.55	209.00	3.55
42.30	3.55	100.00	3.55	210.00	3.55
42.50	3.55	101.00	3.55	212.00	3.55

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
215.00	3.55	22.00	4.00	95.00	4.00
218.00	3.55	24.00	4.00	97.00	4.00
223.00	3.55	25.00	4.00	100.00	4.00
224.00	3.55	28.00	4.00	102.00	4.00
225.00	3.55	31.00	4.00	104.00	4.00
230.00	3.55	35.00	4.00	105.00	4.00
236.00	3.55	36.00	4.00	110.00	4.00
245.00	3.55	37.00	4.00	112.00	4.00
250.00	3.55	37.50	4.00	115.00	4.00
258.00	3.55	44.00	4.00	117.00	4.00
262.00	3.55	48.00	4.00	118.00	4.00
265.00	3.55	49.00	4.00	120.00	4.00
270.00	3.55	50.00	4.00	125.00	4.00
271.00	3.55	52.00	4.00	128.00	4.00
280.00	3.55	55.00	4.00	130.00	4.00
304.00	3.55	56.00	4.00	132.00	4.00
315.00	3.55	60.00	4.00	136.00	4.00
320.00	3.55	62.00	4.00	140.00	4.00
330.00	3.55	64.00	4.00	142.00	4.00
335.00	3.55	65.00	4.00	144.00	4.00
21.30	3.60	66.00	4.00	148.50	4.00
23.00	3.60	67.00	4.00	155.00	4.00
24.60	3.60	68.00	4.00	160.00	4.00
27.80	3.60	69.00	4.00	164.00	4.00
32.50	3.60	70.00	4.00	165.00	4.00
206.50	3.80	71.00	4.00	168.00	4.00
5.00	4.00	72.00	4.00	170.00	4.00
6.50	4.00	74.00	4.00	172.00	4.00
10.00	4.00	75.00	4.00	173.00	4.00
13.00	4.00	80.00	4.00	175.00	4.00
14.00	4.00	82.00	4.00	177.00	4.00
15.00	4.00	84.00	4.00	180.00	4.00
16.00	4.00	85.00	4.00	182.00	4.00
17.00	4.00	90.00	4.00	190.00	4.00
20.00	4.00	92.00	4.00	192.00	4.00

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
200.00	4.00	148.00	4.60	150.00	5.00
210.00	4.00	112.00	4.80	152.00	5.00
225.00	4.00	6.00	5.00	155.00	5.00
228.00	4.00	30.00	5.00	165.00	5.00
230.00	4.00	32.00	5.00	170.00	5.00
235.00	4.00	35.00	5.00	175.00	5.00
240.00	4.00	37.00	5.00	185.00	5.00
250.00	4.00	38.00	5.00	190.00	5.00
260.00	4.00	45.00	5.00	195.00	5.00
265.00	4.00	46.00	5.00	200.00	5.00
275.00	4.00	48.00	5.00	205.00	5.00
282.00	4.00	55.00	5.00	210.00	5.00
300.00	4.00	60.00	5.00	215.00	5.00
305.00	4.00	61.00	5.00	225.00	5.00
310.00	4.00	65.00	5.00	230.00	5.00
340.00	4.00	70.00	5.00	235.00	5.00
350.00	4.00	75.00	5.00	240.00	5.00
360.00	4.00	80.00	5.00	250.00	5.00
370.00	4.00	85.00	5.00	255.00	5.00
380.00	4.00	90.00	5.00	260.00	5.00
390.00	4.00	95.00	5.00	265.00	5.00
400.00	4.00	98.00	5.00	270.00	5.00
415.00	4.00	100.00	5.00	275.00	5.00
440.00	4.00	105.00	5.00	280.00	5.00
470.00	4.00	108.00	5.00	283.00	5.00
588.00	4.00	110.00	5.00	285.00	5.00
670.00	4.00	115.00	5.00	290.00	5.00
87.00	4.20	116.00	5.00	295.00	5.00
35.00	4.25	120.00	5.00	300.00	5.00
44.00	4.50	125.00	5.00	314.00	5.00
45.00	4.50	130.00	5.00	315.00	5.00
60.00	4.50	135.00	5.00	345.00	5.00
80.00	4.50	138.00	5.00	350.00	5.00
190.00	4.50	140.00	5.00	395.00	5.00
95.00	4.60	145.00	5.00	475.00	5.00

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
490.00	5.00	82.00	5.30	170.00	5.30
500.00	5.00	82.50	5.30	175.00	5.30
530.00	5.00	84.50	5.30	180.00	5.30
40.00	5.30	85.00	5.30	185.00	5.30
41.20	5.30	87.50	5.30	187.50	5.30
42.50	5.30	90.00	5.30	190.00	5.30
43.70	5.30	92.50	5.30	195.00	5.30
45.00	5.30	94.60	5.30	200.00	5.30
46.20	5.30	95.00	5.30	206.00	5.30
47.50	5.30	97.50	5.30	212.00	5.30
48.70	5.30	100.00	5.30	218.00	5.30
50.00	5.30	103.00	5.30	224.00	5.30
50.20	5.30	104.10	5.30	230.00	5.30
51.50	5.30	105.00	5.30	236.00	5.30
53.00	5.30	106.00	5.30	243.00	5.30
54.50	5.30	109.00	5.30	250.00	5.30
56.00	5.30	110.00	5.30	258.00	5.30
58.00	5.30	110.50	5.30	265.00	5.30
59.70	5.30	112.00	5.30	270.00	5.30
60.00	5.30	115.00	5.30	272.00	5.30
61.50	5.30	116.00	5.30	280.00	5.30
63.00	5.30	117.40	5.30	290.00	5.30
64.40	5.30	118.00	5.30	300.00	5.30
65.00	5.30	120.00	5.30	307.00	5.30
67.00	5.30	122.00	5.30	315.00	5.30
69.00	5.30	125.00	5.30	325.00	5.30
69.20	5.30	128.00	5.30	335.00	5.30
70.00	5.30	132.00	5.30	344.40	5.30
71.00	5.30	136.00	5.30	345.00	5.30
73.00	5.30	140.00	5.30	355.00	5.30
75.00	5.30	145.00	5.30	365.00	5.30
75.60	5.30	150.00	5.30	375.00	5.30
76.00	5.30	155.00	5.30	387.00	5.30
77.50	5.30	160.00	5.30	389.40	5.30
80.00	5.30	165.00	5.30	400.00	5.30

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
410.00	5.30	130.18	5.33	84.50	5.35
575.00	5.30	135.00	5.33	109.50	5.35
20.17	5.33	138.17	5.33	34.00	5.40
32.69	5.33	147.07	5.33	20.00	5.50
45.00	5.33	158.77	5.33	100.00	5.60
46.00	5.33	177.15	5.33	28.60	5.70
46.20	5.33	177.17	5.33	33.60	5.70
50.16	5.33	193.00	5.33	38.60	5.70
56.00	5.33	202.57	5.33	41.60	5.70
56.50	5.33	208.92	5.33	43.60	5.70
63.17	5.33	215.00	5.33	47.60	5.70
66.04	5.33	215.27	5.33	48.60	5.70
69.50	5.33	216.00	5.33	50.00	5.70
72.39	5.33	220.00	5.33	53.60	5.70
75.57	5.33	221.62	5.33	54.60	5.70
81.92	5.33	225.50	5.33	55.00	5.70
88.30	5.33	227.97	5.33	57.60	5.70
89.34	5.33	233.50	5.33	58.60	5.70
89.69	5.33	235.00	5.33	59.60	5.70
90.50	5.33	239.16	5.33	62.60	5.70
94.45	5.33	240.67	5.33	63.60	5.70
94.62	5.33	247.02	5.33	64.20	5.70
95.50	5.33	253.37	5.33	64.60	5.70
98.02	5.33	278.77	5.33	68.60	5.70
100.97	5.33	304.17	5.33	70.00	5.70
101.16	5.33	323.85	5.33	73.60	5.70
115.50	5.33	346.00	5.33	74.60	5.70
116.00	5.33	354.97	5.33	75.00	5.70
120.20	5.33	359.97	5.33	78.60	5.70
120.65	5.33	368.30	5.33	79.60	5.70
120.77	5.33	380.59	5.33	80.00	5.70
123.20	5.33	608.08	5.33	83.60	5.70
123.80	5.33	104.14	5.34	88.60	5.70
124.00	5.33	227.97	5.34	89.50	5.70
126.37	5.33	329.57	5.34	89.60	5.70

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
93.60	5.70	173.80	5.70	289.00	5.70
98.60	5.70	174.30	5.70	289.30	5.70
99.60	5.70	178.60	5.70	294.30	5.70
100.00	5.70	180.00	5.70	296.00	5.70
103.60	5.70	183.60	5.70	298.60	5.70
105.00	5.70	186.60	5.70	303.60	5.70
108.60	5.70	188.60	5.70	307.30	5.70
109.60	5.70	193.60	5.70	308.60	5.70
113.60	5.70	198.60	5.70	313.60	5.70
114.20	5.70	203.60	5.70	318.60	5.70
114.60	5.70	208.60	5.70	319.30	5.70
118.60	5.70	213.60	5.70	320.00	5.70
119.60	5.70	215.00	5.70	323.60	5.70
120.00	5.70	218.60	5.70	324.30	5.70
123.60	5.70	219.30	5.70	328.60	5.70
124.60	5.70	223.60	5.70	329.50	5.70
125.00	5.70	228.60	5.70	335.00	5.70
128.60	5.70	233.60	5.70	338.60	5.70
129.60	5.70	238.60	5.70	340.00	5.70
133.60	5.70	243.00	5.70	348.60	5.70
134.60	5.70	243.60	5.70	349.30	5.70
135.00	5.70	248.60	5.70	350.00	5.70
138.60	5.70	249.30	5.70	354.30	5.70
143.60	5.70	253.60	5.70	358.60	5.70
145.00	5.70	257.90	5.70	360.00	5.70
148.60	5.70	258.60	5.70	364.30	5.70
149.60	5.70	260.00	5.70	368.60	5.70
153.60	5.70	263.60	5.70	378.00	5.70
158.60	5.70	265.00	5.70	378.60	5.70
159.30	5.70	268.60	5.70	388.60	5.70
160.00	5.70	273.60	5.70	389.30	5.70
163.60	5.70	278.60	5.70	393.30	5.70
168.60	5.70	279.30	5.70	398.60	5.70
170.00	5.70	283.60	5.70	418.60	5.70
173.60	5.70	288.60	5.70	428.60	5.70

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
435.00	5.70	88.27	6.99	329.57	6.99
438.60	5.70	91.00	6.99	342.27	6.99
444.30	5.70	91.44	6.99	345.97	6.99
494.30	5.70	97.79	6.99	384.70	6.99
499.30	5.70	100.97	6.99	393.00	6.99
548.60	5.70	107.32	6.99	405.26	6.99
679.30	5.70	114.70	6.99	481.46	6.99
32.50	6.00	129.50	6.99	552.24	6.99
38.00	6.00	129.54	6.99	608.08	6.99
50.00	6.00	132.72	6.99	633.48	6.99
53.00	6.00	148.59	6.99	50.00	7.00
73.00	6.00	159.12	6.99	60.00	7.00
74.00	6.00	164.00	6.99	66.00	7.00
88.00	6.00	164.40	6.99	68.00	7.00
104.00	6.00	164.47	6.99	76.00	7.00
108.00	6.00	167.47	6.99	85.00	7.00
110.00	6.00	180.50	6.99	86.00	7.00
115.00	6.00	183.52	6.99	87.00	7.00
128.00	6.00	186.02	6.99	88.80	7.00
180.00	6.00	202.57	6.99	90.00	7.00
188.00	6.00	208.90	6.99	91.00	7.00
249.00	6.00	208.91	6.99	92.00	7.00
258.00	6.00	211.02	6.99	96.00	7.00
290.00	6.00	217.00	6.99	97.00	7.00
300.00	6.00	227.97	6.99	100.00	7.00
325.00	6.00	234.32	6.99	101.00	7.00
420.00	6.00	240.67	6.99	103.00	7.00
448.00	6.00	242.00	6.99	106.00	7.00
120.00	6.30	250.00	6.99	109.00	7.00
30.00	6.50	259.00	6.99	112.00	7.00
35.00	6.50	259.70	6.99	115.00	7.00
912.00	6.70	266.06	6.99	116.80	7.00
78.50	6.99	285.11	6.99	117.00	7.00
78.74	6.99	295.50	6.99	118.00	7.00
81.92	6.99	304.17	6.99	120.00	7.00

内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W	内 徑 ID	綫 徑 W
122.00	7.00	243.00	7.00	475.00	7.00
128.00	7.00	244.00	7.00	487.00	7.00
132.00	7.00	247.00	7.00	499.00	7.00
136.00	7.00	250.00	7.00	500.00	7.00
140.00	7.00	255.00	7.00	515.00	7.00
145.00	7.00	258.00	7.00	530.00	7.00
150.00	7.00	265.00	7.00	545.00	7.00
155.00	7.00	272.00	7.00	560.00	7.00
158.10	7.00	280.00	7.00	580.00	7.00
160.00	7.00	290.00	7.00	590.00	7.00
165.00	7.00	292.00	7.00	600.00	7.00
168.80	7.00	300.00	7.00	615.00	7.00
170.00	7.00	307.00	7.00	630.00	7.00
175.00	7.00	315.00	7.00	650.00	7.00
180.00	7.00	320.00	7.00	670.00	7.00
183.50	7.00	325.00	7.00	700.00	7.00
184.00	7.00	330.00	7.00	890.00	7.00
185.00	7.00	335.00	7.00	942.00	7.00
186.00	7.00	345.00	7.00	582.00	7.50
190.00	7.00	354.97	7.00	55.00	8.00
195.00	7.00	355.00	7.00	405.00	8.00
198.00	7.00	365.00	7.00	114.50	8.40
200.00	7.00	373.00	7.00	140.00	8.40
202.00	7.00	375.00	7.00	270.00	8.40
205.00	7.00	380.00	7.00	329.50	8.40
206.00	7.00	384.70	7.00	344.50	8.40
210.00	7.00	387.00	7.00	369.50	8.40
212.00	7.00	400.00	7.00	409.50	8.40
216.00	7.00	411.00	7.00	414.50	8.40
218.00	7.00	412.00	7.00	434.50	8.40
224.00	7.00	425.00	7.00	484.50	8.40
225.00	7.00	430.00	7.00	574.50	8.40
230.00	7.00	437.00	7.00	642.00	8.40
236.00	7.00	450.00	7.00	908.00	8.40
242.00	7.00	462.00	7.00	147.80	8.60

内 径 ID	綫 径 W	内 径 ID	綫 径 W	内 径 ID	綫 径 W
152.80	8.60	502.80	8.60		
167.80	8.60	517.80	8.60		
227.80	8.60	652.80	8.60		
232.80	8.60	685.00	8.60		
235.00	8.60	912.00	8.60		
237.80	8.60	160.00	9.00		
247.80	8.60	180.00	9.00		
257.80	8.60	220.00	9.50		
262.80	8.60	80.00	10.00		
282.60	8.60	250.00	10.00		
282.80	8.60	524.50	10.00		
287.80	8.60	720.00	10.00		
292.80	8.60	732.50	10.00		
293.30	8.60	908.00	10.00		
297.80	8.60	358.00	10.30		
302.80	8.60	120.00	10.50		
307.80	8.60	258.00	11.00		
327.80	8.60	256.00	12.00		
332.80	8.60	585.00	12.00		
337.80	8.60	254.00	13.00		
342.80	8.60	534.00	26.00		
352.80	8.60	21.20	27.40		
362.80	8.60	24.40	30.60		
372.80	8.60				
377.80	8.60				
382.80	8.60				
395.00	8.60				
397.80	8.60				
422.80	8.60				
425.00	8.60				
430.50	8.60				
430.80	8.60				
445.00	8.60				
482.80	8.60				
485.00	8.60				

全氟化橡膠-FFKM

D• |(FFKM)«Ye*s%® ˘°± 2• 3gµ`¶s·, s 1°C»ž Bs¼ ½ † ¾ ¿5-°# \$BG*°

D• |(FFKM)«YÀ,ÁÂϕ• 3Ä (PTFE)Å Æ 59|y2 s9-™ 2sÇ • «Y(FKM)È É Ê 2Ë — Í5¢ Î2 ÏsÐ % Ñ Ò Ó Ô Õ 5@× ¨½ † Ï)sÛ ½ † 1G5FKM&PTFE&FFKM gµN' # \$BG*sÛ Ü Ö Ñ -Ý %&cP&rs&|C&§: &67gàáP Ĩg__°

D• |«Yã,äÜ 59™ 2sâæ ç -20 éRg ìæ -™ g 326éRgsP ĩñÕ __à534°

全氟化密封件應用領域

特 性	行 業	應 用
耐油、耐溶劑、耐藥品性	分析儀器	◎氣體、液體的色譜儀的密封件。 ◎分析裝置的密封產品。 ◎監視系統機器類的密封、軟管、閥門、膜片類。
耐提取、耐洗脫、耐揮發性	理化學分析設備	◎熱、質量、電子綫、 X綫/真空、光學、提取等的分析、化工學精密設備中使用的軟管、閥門、膜片類。
耐溶劑性	塗料、塗裝儀器設備	◎泵、攪拌機、混合機類的密封、軟管、膜片部品。
	印刷設備	◎印刷滾筒、塗膠刀、膜片部品
	辦公3C設備	◎打印機等墨水用軟管、復印機用滾筒
	IC密裝半導體產業	◎過濾器、泵等的密封、軟管、膜片部品。
耐藥品性、耐熱水性	化學工業	◎醫藥、農藥制造的密封、軟管、閥門、膜片類。 ◎染料合成的密封、軟管、閥門、膜片類。 ◎樹脂制造的密封、軟管、閥門、膜片類。 ◎界面活性劑制造的密封、軟管、閥門、膜片類。
	電解工業	◎隔膜密封材、軟管部品。
	電池工業	◎密封、軟管。
	其他產業	◎有高腐蝕氣體性要求的軟管、閥門、膜片。

全氟化密封件牌號性能

行業	航空航天		石化流程			
FFKM 牌號	7206	7205	7029	7212	7207	7020
顏色	黑色	黑色	黑色	黑色	黑色	黑色
硬度 Shore A	75	75	75	75	75	80
溫度範圍	320℃ -6℃	325℃ -6℃	230℃ -20℃	260℃ -7℃	300℃ -6℃	230℃ -7℃
拉伸強度 Mpa	16.9	18.6	17.1	18.5	18.6	18.0
斷後拉伸 率%	175	160	260	195	170	160
壓縮永久變 形率*%, 70h,200℃	16	17	25	18	16	20
壓縮永久變 形率*%, 70h,230℃	21	20	32	30	21	30
壓縮永久變 形率*%, 70h,250℃	30	23	43	45	30	55
壓縮永久變 形率*%, 70h,300℃	58	31	-	-	58	-

*美標、日標、全尺寸可訂制

全氟化密封件牌號性能




行業	食品 醫藥	半 導 體					
FFKM 牌號	1213	5032	5313	5395	5508	5509	5508
顏色	黑色	白色	白色	半透明	黑色	半透明	白色
硬度 Shore A	75	75	75	75	80	75	75
溫度範圍	230℃ -4℃	230℃ -7℃	300℃ -6℃	280℃ -6℃	230℃ -7℃	280℃ -6℃	325℃ -6℃
拉伸強度 Mpa	22.1	18.0	20.1	13.5	18.0	18.3	15.7
斷後拉伸 率%	165	190	190	235	160	200	246
壓縮永久變 形率*%, 70h,200℃	34	21	22	22	20	13	19
壓縮永久變 形率*%, 70h,230℃	39	50	25	23	30	25	19
壓縮永久變 形率*%, 70h,250℃	50	70	31	25	55	40	18
壓縮永久變 形率*%, 70h,300℃	-	-	-	31	-	45	33

*美標、日標、全尺寸可訂制

耐油O型條 Rubber Cord

材質:

丁腈橡膠/NBR
 硅橡膠/VMQ/SI
 氟橡膠/FPM

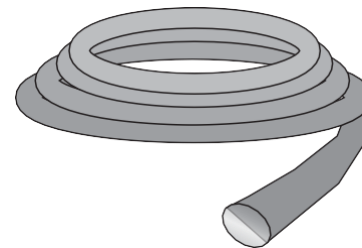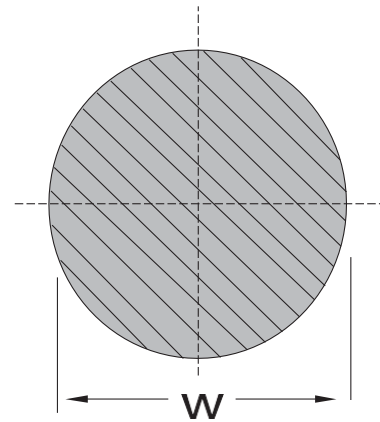

綫徑w--m/m
1.20
1.50
1.78
2.50
2.62
3.00
3.50
4.00
4.50
5.00
5.34
5.50

綫徑w--m/m
6.00
6.50
7.00
7.50
8.00
8.50
9.00
9.50
10.00
11.00
12.00
13.00

綫徑w--m/m
14.00
15.00
16.00
17.00
18.00
19.00
20.00
21.00
22.00
23.00
24.00

四氟包覆O形型圈 PTFE Encapsulated O-Ring



產品信息：

CHEM 密封圈結合了橡膠的彈性和聚四氟乙烯的耐化學性，它是由一個硅膠或氟膠制的內芯和相對較薄的 FEP 或 PFA 外覆層組合而成。

包覆O型圈可應用于普通橡膠O型圈無法適應的某些化學介質等特殊工作環境中。彈性由橡膠內芯產生，而抗化學介質特性由無縫的FEP/PFA包覆層保證，該產品既有橡膠O型圈所具有的彈性、低壓縮永久變形性能，又具有FEP/PFA所特有的耐熱、耐寒、耐油、耐磨、耐氣候老化、耐化學介質腐蝕等特性，可應用于各種動、靜密封場合，可代替部分傳統的橡膠O型圈和昂貴的全氟醚O型圈

Product Info:

The seal combines the elasticity of rubber and the chemical resistance of Teflon. It is a combination of a silicon or FKM O-Ring and a thin FEP or PFA outer layer.

Encapsulated o-rings are specialty seals designed for use in applications where high temperature and corrosive conditions make the use of traditional elastomer o-rings in-feasible.

The o-rings are comprised of two parts: a rubber inner core, which provides compression and elasticity, and a thin outer jacket made from Teflon®, which gives the seal high corrosion resistance and thermal stability. They are widely used in chemical, petrochemical, food, and pharmaceutical processes, where seals are required to

perform reliably in extremely harsh environments. Encapsulated o-rings are ideal in static applications, but in many situations have also been used in dynamic applications like mechanical seals.

材質適用溫度範圍：

外殼：FEP-60℃...205℃可在260℃高溫下短時間使用

外殼：PFA-60℃...260℃可在300℃高溫下短時間使用

內芯：F--氟橡膠

內芯：S--硅橡膠

Temperature Range:

Layer : FEP -60°C to 205°C Maximum 260°C

Layer : PFA -60°C to 260°C Maximum 300°C

O-Ring : FKM

O-Ring : SILICON

主要優點：

- 1、突出的耐化學性能，幾乎適用所有化學介質
- 2、抗腐蝕性優良
- 3、溫度適用範圍寬
- 4、耐壓縮性好
- 5、抗摩擦
- 6、良好的抗溶漲性
- 7、耐高壓
- 8、優異的密封持久性，使用壽命長

Main Advantage:

1. Outstanding chemical resistance, almost to all chemical medium
2. Excellent corrosion resistance
3. Broad range in working temperature
4. Good Impact Strength
5. Abrasion Resistant
6. Low absorption
7. High Pressure Resistant
8. Uniformity, Long Life

應用設備和行業：

應用設備：

1. 泵和閥門、
2. 反應容器、
3. 壓力容器、
4. 過濾器、
5. 機械密封、
6. 換熱器、
7. 鍋爐、
8. 管路法蘭、
9. 氣體壓縮機

應用行業：

1. 制藥工業、
2. 石油化工、
3. 油漆噴塗、
4. 造紙業、
5. 染料制造、
6. 制冷工業、
7. 食品加工業、
8. 飛機制造業、
9. 煉油行業

Application Machinery and Industry:

Application Machinery:


1. Valve and Pump
2. Reaction Vessel
3. Pressure Vessel
4. Filter
5. Mechanical Seal
6. Heat Exchanger
7. Boiler
8. Flange
9. Air Compressor

Application Industry:

1. Pharmaceutic Industry
2. Petrochemical Industry
3. Painting Industry
4. Pulp & Paper Making Industry
5. Dyeing Process
6. Air Condition
7. Food Industry
8. Aerial Equipment
9. Oil Refinery

型號規格描述：

Description:

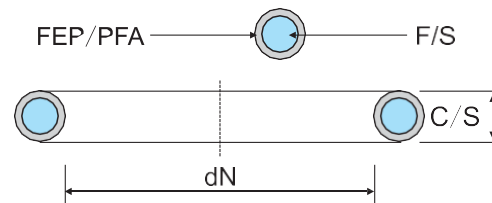

各種截徑的最小內徑表 C/S and ID


截 徑 C / S	最小內徑 ID	截 徑 C / S	最小內徑 ID
1.50	9.00	2.00	12.00
1.60	9.00	2.40	12.00
1.78	9.25	2.50	12.00

VP型特康泛塞密封

VP Spring Energized PTFE Piston/Rod Seal

由一專用螺旋彈簧施力的單作用活塞(桿)密封，由於它的磨擦力小，且在很大的變形範圍內預加負載力相當穩定。VP 型泛塞密封用在磨擦力必須保持在很窄的允差範圍內，例如在壓力開關的場合。

VP seal is designed for thermal and corrosive extremes that make the requirement for a stable seal leg unobtainable using other designs or material. It demonstrates excellent capability to the control of friction and compensation of manufacturing tolerance or higher side load effect.

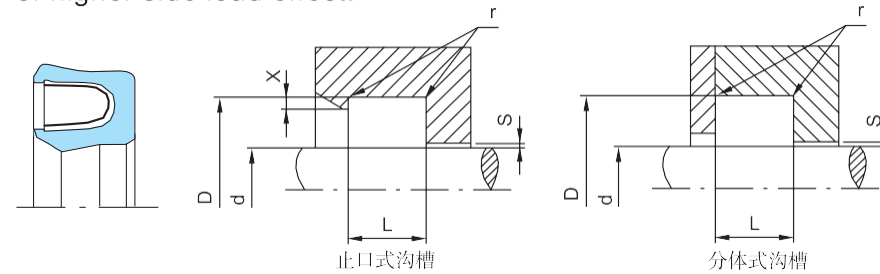

TYPE	d*D*L
VP	2*6*3.3
VP	3*6*3.3
VP	2*7*3.3
VP	2.5*7*3.3
VP	4*7*3.3
VP	3*8*3.3
VP	4*8*3.3
VP	5*8*3.3
VP	4*8*3.3
VP	5*8*3.3
VP	4*9*3.3
VP	4.5*9*3.3
VP	5*9*3.3
VP	6*9*3.3

TYPE	d*D*L
VP	4*9.5*3.3
VP	4.5*9.5*3.3
VP	5*9.5*3.3
VP	4*10*3.3
VP	5*10*3.3
VP	6*10*3.3
VP	5*12*3.3
VP	6*12*3.3
VP	7*12*3.3
VP	8*12*3.3
VP	8.5*12*3.3
VP	9*12*3.3
VP	5*13*3.3
VP	6*13*3.3

TYPE	d*D*L
VP	6.8*13*3.3
VP	7*13*3.3
VP	8*13*3.3
VP	8.5*13*3.3
VP	9*13*3.3
VP	10*13*3.3
VP	6*14*3.3
VP	6.8*14*3.3
VP	7*14*3.3
VP	8*14*3.3
VP	9*14*3.3
VP	10*14*3.3
VP	6*15*3.3
VP	7*15*3.3
VP	8*15*3.3
VP	9*15*3.3
VP	10*15*3.3
VP	7*16*3.3
VP	8*16*3.3
VP	9*16*3.3
VP	10*16*3.3
VP	12*16*3.3
VP	10*17*3.3
VP	12*17*3.3
VP	13*17*3.3
VP	8*18*3.3
VP	9*18*3.3
VP	10*18*3.3
VP	11.4*18*3.3
VP	12.6*19.2*3.3
VP	13.4*20*3.3
VP	14.6*22*3.7
VP	16.6*24*3.7
VP	42.6*25*3.7
VP	18.6*26*3.7


TYPE	d*D*L
VP	20.6*28*3.7
VP	22*30*4
VP	23*31*4
VP	23.5*31.5*4
VP	25*33*4
VP	27*35*4
VP	27.4*35.4*4
VP	27.5*35.5*4
VP	29.6*38*4.2
VP	31.6*40*4.2
VP	32.6*41*4.2
VP	33.6*42*4.2
VP	36.1*44.5*4.2
VP	36.6*45*4.2
VP	41*50*4.5
VP	42.5*51.5*4.5
VP	46*55*4.5
VP	47*56*4.5
VP	51*60*4.5
VP	52*61*4.5
VP	54*63*4.5
VP	56*63*4.5
VP	57*66*4.5
VP	60*69*4.5
VP	60*70*5
VP	61*71*5
VP	65*75*5
VP	66*76*5
VP	70*80*5
VP	75*85*5
VP	79*90*5.5
VP	84*95*5.5
VP	89*100*5.5
VP	94*105*5.5
VP	97.6*110*6.2

VD型旋轉泛塞密封

VD Spring Energized PTFE Rotary Seal

它是一種用於旋轉軸處的單向作用密封，由一U型密封套和一個V型不鏽鋼彈簧所組成。由於再外部有一凸緣，所以可以防止它在溝槽內旋轉，特康旋轉泛塞密封唇短而厚，降低了摩擦，使用壽命長，在黏度很高的介質中也有良好的防塵效果。

A single-acting sealing element comprised of a U-shaped ring and metallic energizing finger spring. It offers low friction with no stick-slip, minimized break out force and high wear resistance. Its constrained flange eliminates potential seal rotation and it is resistant to most liquids and chemicals. Unlimited shelf life.

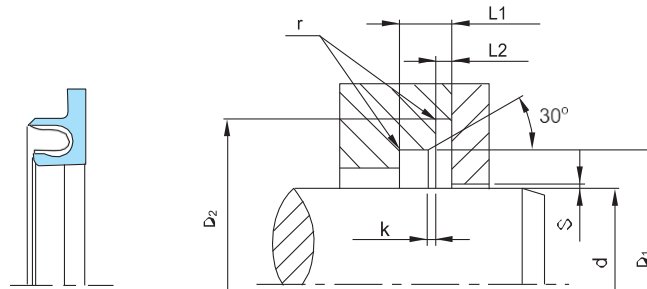

TYPE	d*D*
VD	20.5*30*4.3*3.3
VD	22*31.5*4.3*3.3
VD	22.5*32*4.3*3.3
VD	25.5*35*4.3*3.3
VD	26*35.5*4.3*3.3
VD	30*40*4.3*3.3
VD	35*45*4.3*5.0
VD	40*50*4.3*5.0
VD	45*55*4.3*5.0
VD	46*56*4.3*5.0
VD	50*60*4.3*5.0
VD	48*63*7.3*5.0

TYPE	d*D*
VD	50*65*7.3*5.0
VD	54*69*7.3*5.0
VD	55*70*7.3*5.0
VD	56*71*7.3*5.0
VD	60*75*7.3*5.0
VD	65*80*7.3*5.0
VD	70*85*7.3*5.0
VD	75*90*7.3*5.0
VD	80*95*7.3*5
VD	85*100*7.3*5
VD	92*108*7.3*5
VD	94*110*7.3*5

TYPE	d*D*
VD	96*112*7.3*5
VD	104*120*7.3*6
VD	109*125*7.3*6
VD	114*130*7.3*6
VD	124*140*7.3*6
VD	129*145*7.3*6
VD	134*150*7.3*6
VD	139*155*7.3*6
VD	144*160*7.3*6
VD	148*170*10.8*7.5
VD	158*180*10.8*7.5
VD	168*190*10.8*7.5
VD	178*200*10.8*7.5
VD	182*201*10.8*7.5
VD	188*210*10.8*7.5
VD	192*220*10.8*7.5
VD	202*224*10.8*7.5
VD	203*225*10.8*7.5
VD	208*230*10.8*7.5
VD	218*240*10.8*7.5
VD	228*250*10.8*7.5
VD	236*260*11.7*8
VD	246*270*11.7*8
VD	256*280*11.7*8
VD	266*290*11.7*8
VD	276*200*11.7*8
VD	286*310*11.7*8
VD	296*320*11.7*8
VD	308*330*9.75*8
VD	336*360*11.7*8
VD	455*485*14.8*10
VD	470*500*14.8*10
VD	515*550*17.2*10
VD	570*600*14.8*10
VD	620*650*14.8*10


[illegible]

HR型特康泛塞密封

HR Spring Energized PTFE Flange Seal

含有一U型特康圈和一盤繞的不鏽鋼施力彈簧的單作用密封元件。單位密封力大。即使在低溫也能封住氣體。

A single-acting sealing element comprised of a U-shaped ring and a coiled metallic energizing spring. The seal has a high specific sealing force and gives gas-tight sealing even at low temperatures. Resistant to most liquids and chemicals it has unlimited shelf life. Used for radial static or slightly dynamic applications, the seal is available in versions for cryogenic service.

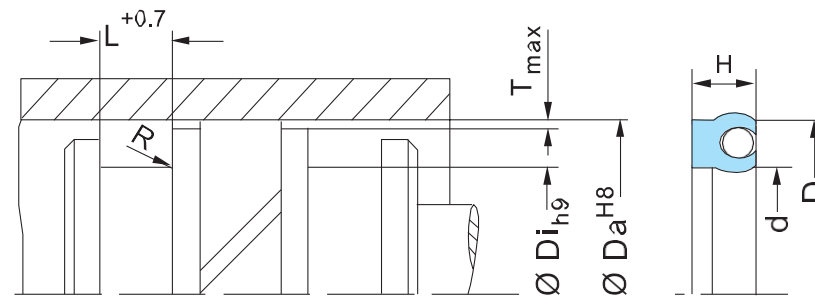

TYPE	d*D*H
HR	3*6*2.3
HR	4*7*2.3
HR	5*8*2.3
HR	6*9*2.3
HR	7*10*2.3
HR	8*11*2.3
HR	9*12*2.3
HR	10*13*2.3
HR	10*14*3
HR	11*15*3
HR	11.2*15.2*3
HR	12*16*3
HR	12.5*16.5*3
HR	14*18*3


TYPE	d*D*H
HR	15*19*3
HR	16*20*3
HR	18*22*3
HR	20*24*3
HR	21*25*3
HR	22*26*3
HR	22*28*4.4
HR	22.4*28.4*4.4
HR	24*30*4.4
HR	25*31*4.4
HR	25.5*31.5*4.4
HR	26*32*4.4
HR	28*34*4.4
HR	29*35*4.4

TYPE	d*D*H
HR	29.5*35.5*4.4
HR	30*36*4.4
HR	31*37*4.4
HR	31.5*37.5*4.4
HR	32*38*4.4
HR	34*40*4.4
HR	35*41*4.4
HR	35.5*41.5*4.4
HR	36*42*4.4
HR	38*44*4.4
HR	39*45*4.4
HR	40*46*4.4
HR	41*47*4.4
HR	42*48*4.4
HR	44*50*4.4
HR	45*51*4.4
HR	58*68*7
HR	60*70*7
HR	62*72*7
HR	63*73*7
HR	65*75*7
HR	67*77*7
HR	70*80*7
HR	71*81*7
HR	28*34*4.4
HR	29*35*4.4
HR	29.5*35.5*4.4
HR	30*36*4.4
HR	31*37*4.4
HR	31.5*37.5*4.4
HR	32*38*4.4
HR	34*40*4.4
HR	35*41*4.4
HR	35.5*41.5*4.4
HR	36*42*4.4

TYPE	d*D*H
HR	38*44*4.4
HR	39*45*4.4
HR	40*46*4.4
HR	41*47*4.4
HR	42*48*4.4
HR	44*50*4.4
HR	45*51*4.4
HR	58*68*7
HR	60*70*7
HR	62*72*7
HR	63*73*7
HR	65*75*7
HR	67*77*7
HR	70*80*7
HR	71*81*7
HR	185*200*10.5
HR	190*205*10.5
HR	195*210*10.5
HR	200*215*10.5
HR	205*220*10.5
HR	209*224*10.5
HR	210*225*10.5
HR	215*230*10.5
HR	220*235*10.5
HR	225*240*10.5
HR	230*245*10.5
HR	235*250*10.5
HR	240*255*10.5
HR	245*260*10.5
HR	250*265*10.5
HR	255*270*10.5
HR	260*275*10.5
HR	265*280*10.5
HR	270*285*10.5
HR	275*290*10.5

KDAS密封件

KDAS Double Acting Seal

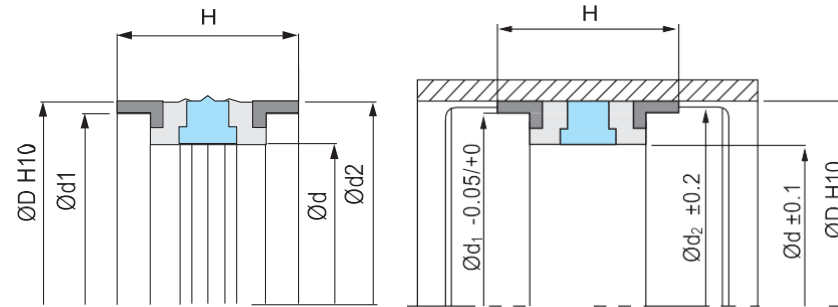

一、概述：

KDAS組合封是個雙作用的活塞密封件，由三部分組成：一個彈性體A、兩個支撐環B、兩個導向環C。彈性體A有一個特別截面，三個密封唇口緊貼缸壁（動密封）。中間唇口較厚，起主要密封作用，其他兩個唇口起輔助密封作用。底側與活塞溝槽底部緊貼（靜密封），接觸面相對較大。支撐環B置於A兩側起定位作用。來支撐彈性體A並防止A出現徑向密封間隙。支撐環B呈階梯狀，與密封元件接觸的一側有許多凸塊用以防止密封圈在工作時旋轉。導向環C呈矩形，裝在活塞上起導向和吸收軸向力的作用。導向環上下都開了幾條軸向槽，使壓力油能流過導向環，從而使彈性體A能感受全部工作壓力再換方向時快速釋放壓力。這樣就很好的防止了在彈性體A前產生持續超高壓。KDAS組合材料的硬度從內到外逐步增加，根據其特點，分別起到密封，支撐和導向作用。

二、性能與用途：

緊湊的密封結構使活塞總長度較短，降低了加工成本有著極佳的抗間隙積壓性能。工作時彈性體不會扭轉，有着合理的泄露以減少摩擦。主要用於活塞及液壓缸的密封。如：推土機、挖掘機、裝載機、起重機、液壓閘門及農業機械等。

三、材質：

彈性體 – 丁腈橡膠

支撐環 – 尼龍或聚氨脂

導向環 – 尼龍或聚甲醛

四、工作條件：

溫度：-30~+120℃，最大工作壓力：35MPa，最大轉速
0.5m/s。

1. Description

A double-acting compact piston seal with an integrated Back-up Ring and guide ring. The multi-lip elastomer seal element is backed on both sides with fiber-reinforced profile rings. Recommended for high pressure applications and where vibration occurs.

2. Appliance and Property

The KDAS double-acting piston seal in a robust five part assembly is designed specifically for one piece pistons in a wide range of medium duty applications. The seal is also suitable for two piece pistons.

3. Material

Elastomer: NBR

Back-up Ring: Nylon or PU

Glyd Ring: Nylon or POM

4. Working Conditions

Working Temperature: -30℃ to 120℃

Maximum working pressure: 35Mpa

Maximum line speed: 0.5m/s

TYPE	d*D*H	TYPE	d*D*H
KDAS020	11*20*17.7	KDAS025/3	16*25*17.7
KDAS022	13*22*17.7	KDAS028	19*28*17.7
KDAS025	15*25*29.1	KDAS030	17*30*28.1
KDAS025/1	15*25*20	KDAS030/1	21*30*17.7
KDAS025/2	15*25*20.5	KDAS032	22*32*29.1

TYPE	d*D*H
KDAS032/1	22*32*20.7
KDAS032/2	24*32*21.9
KDAS035	25*35*29.1
KDAS035/1	25*35*20.7
KDAS040	24*40*31.1
KDAS040/1	26*40*20.7
KDAS040/2	30*40*29.1
KDAS040/3	30*40*20.5
KDAS040/4	30*40*20.5
KDAS040/5	32*40*21.9
KDAS042	28*42*20.4
KDAS045	29*45*31.1
KDAS045/1	31*45*20.7
KDAS045/2	35*45*29.1
KDAS050	34*50*31.1
KDAS050/1	34*50*26.7
KDAS050/2	38*50*28.9
KDAS055	39*55*31.1
KDAS055/1	39*55*26.7
KDAS056	40*56*26.7
KDAS060	44*60*31.1
KDAS060/1	44*60*26.7
KDAS060/2	48*60*28.9
KDAS063	47*63*31.1
KDAS063/1	47*63*26.7
KDAS063/2	47*63*32.1
KDAS063/3	51*63*28.9
KDAS065	49*65*26.7
KDAS065/1	50*65*31.1
KDAS070	50*70*35.1
KDAS070/1	54*70*26.7
KDAS070/2	58*70*28.9
KDAS075	55*75*35.1
KDAS075/1	59*75*26.7
KDAS080	60*80*35.1

TYPE	d*D*H
KDAS080/1	62*80*29.7
KDAS080/2	66*80*32.9
KDAS085	65*85*35.1
KDAS090	70*90*35.1
KDAS090/1	72*90*29.7
KDAS090/2	76*90*32.9
KDAS095	75*95*35.1
KDAS100	75*100*35.1
KDAS100/1	80*100*38.1
KDAS100/2	82*100*29.7
KDAS100/3	86*100*32.9
KDAS105	80*105*35.1
KDAS110	85*110*35.1
KDAS110/1	92*100*29.7
KDAS110/2	96*110*32.9
KDAS115	90*115*35.1
KDAS115/1	97*115*29.7
KDAS120	95*120*35.1
KDAS120/1	106*120*32.9
KDAS125	100*125*38.1
KDAS125/1	103*125*36.7
KDAS125/2	108*125*40.9
KDAS130	105*130*44.4
KDAS130/1	105*130*38.1
KDAS130/2	113*130*40.9
KDAS135	110*135*44.4
KDAS135/1	110*135*38.1
KDAS140	115*140*44.4
KDAS140/1	115*140*38.1
KDAS140/2	118*140*36.7
KDAS140/3	123*140*40.9
KDAS145	120*145*44.4
KDAS145/1	120*145*38.1
KDAS150	125*150*44.4
KDAS150/1	125*150*38.1

[illegible]

[illegible]

[illegible]